

B6IC


6" UNIVERSAL IC HOUSING

BAFFLE TRIM



6"

INCANDESCENT

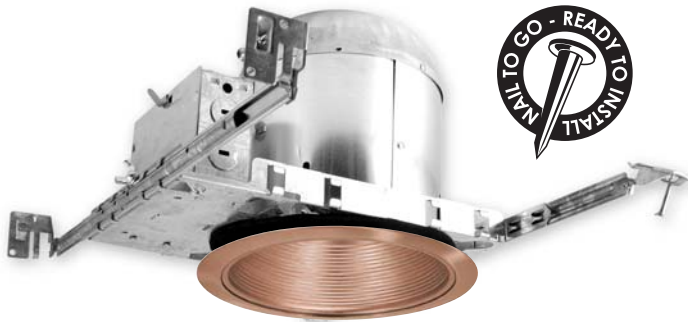

DESCRIPTION:

For new construction. Thermally protected, IC rated specification grade recessed housing. Accommodates up to 75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30 and 60W A19 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

LAMP WATTAGE: (1) Maximum **75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30, 60W A19**

* Maximum lamp wattage may vary based on trim.

SPECIFICATION:

A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on adjustable mounting bracket is designed to allow usage of different lamp types, as well as proper and consistent lamp positioning.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.


D. JUNCTION BOX - UL and ETL listed for through-branch circuit wiring, provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlampping and misuse of insulation material.

UL and C-UL listed
ETL and C-ETL listed
for Damp location.

UL listed
ETL listed
for Feed Through wiring.

UL listed
ETL listed
for Direct Contact with Insulation.

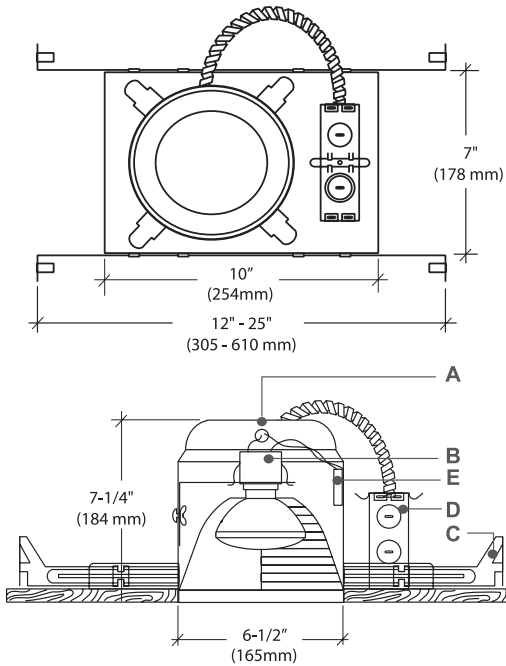

ORDERING INFORMATION, PLEASE SPECIFY:

TYPE	OPTION(S)	TRIM TYPE				BAFFLE	TRIM RING
B6IC*	AIR SHUT	<input type="checkbox"/> B630	<input type="checkbox"/> AF634	<input type="checkbox"/> B636	<input type="checkbox"/> B651	<input type="checkbox"/> W	<input type="checkbox"/> WH
	<input type="checkbox"/> AT	<input type="checkbox"/> B631	<input type="checkbox"/> B610	<input type="checkbox"/> B637	<input type="checkbox"/> B611	<input type="checkbox"/> P	<input type="checkbox"/> BK
WAGO	<input type="checkbox"/> W	<input type="checkbox"/> AF637	<input type="checkbox"/> B609	<input type="checkbox"/> B656	<input type="checkbox"/> B647	<input type="checkbox"/> SN	<input type="checkbox"/> SN
		<input type="checkbox"/> AF631	<input type="checkbox"/> B646	<input type="checkbox"/> B675	<input type="checkbox"/> B624	<input type="checkbox"/> CP	<input type="checkbox"/> CP
		<input type="checkbox"/> AF639	<input type="checkbox"/> B616	<input type="checkbox"/> B676		<input type="checkbox"/> BZ	<input type="checkbox"/> CH
		<input type="checkbox"/> AF640	<input type="checkbox"/> B673	<input type="checkbox"/> B225			<input type="checkbox"/> PB
		<input type="checkbox"/> AF649	<input type="checkbox"/> B635	<input type="checkbox"/> B653			<input type="checkbox"/> BZ

*For standard housing leave options blank

Specified:

B6IC - - - - -

TYPE OPTION(1) OPTION(2) TRIM TYPE BAFFLE TRIM RING

(Sample of Catalog Number: **B6IC-AT-B630-W-WH**)

SPECIFIED BY:


TYPE:

JOB NAME:



Tel: 323-888-1973 • 877-375-5555 / Fax: 323-888-1977 • 877-375-3333
www.iuseelite.com • E-mail: sales@iuseelite.com

B630 _____
METAL STEPPED BAFFLE

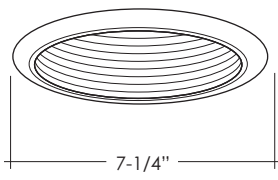


MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30,
50W PAR30, 45W PAR38

BAFFLE:
W, P, SN, CP, BZ

RING:
WH, BK, SN, CP, CH, PB, BZ

B631 _____
R30 PHENOLIC BAFFLE W/ METAL RING

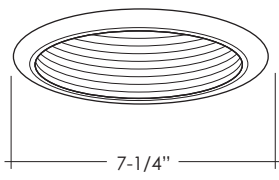


MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30,
50W PAR30, 45W PAR38

BAFFLE:
W, P

RING:
WH, BK, SN, CP, CH, PB


AF637 _____
SELF-FLANGE AIR-SHUT BAFFLE

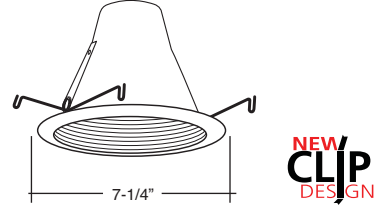

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30,
50W PAR30, 60W A19

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ


AF631 _____
SELF-FLANGE AIR-SHUT BAFFLE

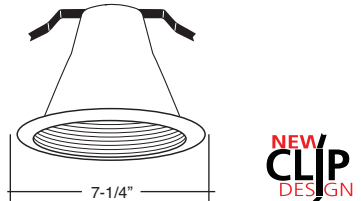

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30,
50W PAR30, 45W PAR38

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ


AF639 _____
SELF-FLANGE AIR-SHUT BAFFLE

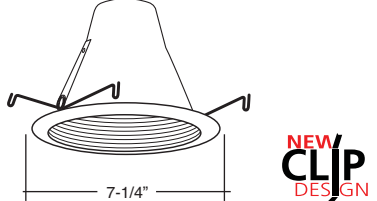

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30,
50W PAR30, 60W A19

AVAILABLE COLOR COMBINATION:
W-WH (WHITE MATT FINISH)

AF640 _____
DEEP SELF-FLANGE AIR-SHUT BAFFLE

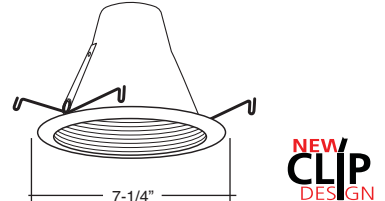

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR40, 65W
BR30, 65W PAR38, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATION:
W-WH, P-WH


AF649 _____
DEEP SELF-FLANGE AIR-SHUT BAFFLE



MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR40, 65W
BR30, 65W PAR38, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ


AF634 _____
DEEP SELF-FLANGE AIR-SHUT BAFFLE

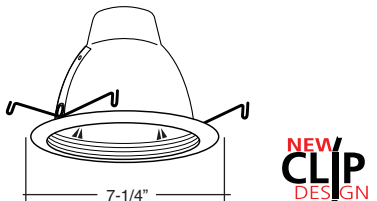

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR40, 65W
BR30, 65W PAR38, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATIONS:
P-CL, W-CL

B610 _____
CONE REFLECTOR W/ BAFFLE



MAX. LAMP WATT:
60W A19

BAFFLE: W, P **REFLECTOR:** CL, RG


RING:
WH, BK, SN, CP, CH, PB

RING/TRIM FINISHES: WH=White BK=Black SN=Satin Nickel CP=Copper CH=Chrome PB=Polished Brass BZ=Bronze
BAFFLE FINISHES: W=White P=Black SN=Satin Nickel CP=Copper BZ=Bronze
REFLECTOR FINISHES: CL=Chrome RG=Gold W=White MB=Black CP=Copper SN=Satin Nickel






B609 _____
REGRESSED EYEBALL W/ BAFFLE

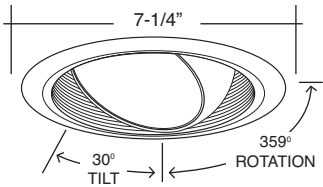


- MAX. LAMP WATT:**
75W R30/PAR30, 65W BR30, 50W PAR30
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB
- EYEBALL:**
WH, BK, SN, CP, CH, PB

B646 _____
EYEBALL WITH BAFFLE

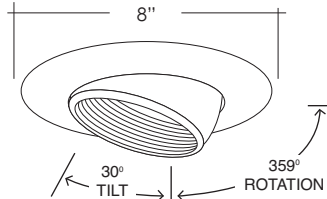


- MAX. LAMP WATT:**
75W R30, 75W PAR30,
65W BR30, 50W PAR30
- BAFFLE:**
W, P
- RING:**
WH

B616 _____
PAR20 REG. EYEBALL W/ BAFFLE (30° TILT)

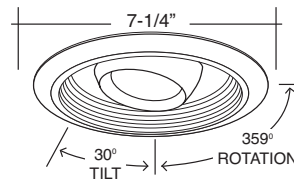


- MAX. LAMP WATT:**
50W R20, 50W PAR20, 50W BR20
- BAFFLE:**
W, P
- RING:**
WH

B673 _____
PAR30 GIMBAL TRIM (35° TILT)

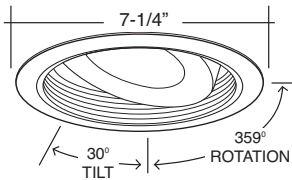


- MAX. LAMP WATT:**
75W PAR30, 50W PAR30
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB
- GIMBAL RING:**
WH, BK, SN, CP, CH, PB

B635 _____
BAFFLE W/ ALBALITE LENS

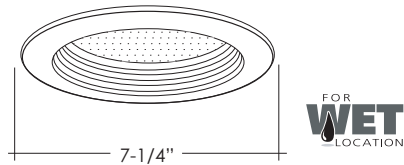


- MAX. LAMP WATT:**
40W A19
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB

B636 _____
BAFFLE W/ FRESNEL LENS

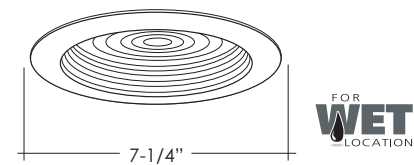


- MAX. LAMP WATT:**
40W A19
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB

B637 _____
BAFFLE W/ DROP OPAL LENS

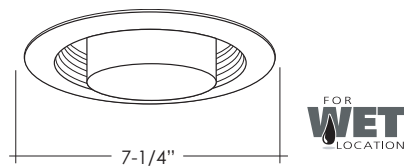


- MAX. LAMP WATT:**
40W A19
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB

B656 _____
BAFFLE W/ FROSTED DOME SHOWER LENS

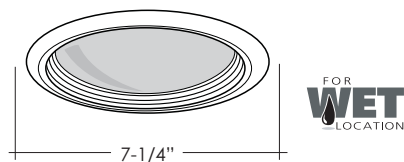

- MAX. LAMP WATT:**
40W A19
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB

B675 _____
BAFFLE W/ PRISMATIC LENS

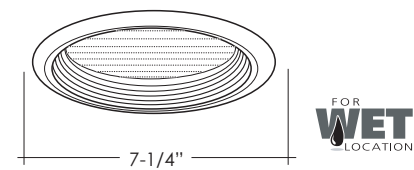


- MAX. LAMP WATT:**
40W A19
- BAFFLE:**
W, P, SN, CP
- RING:**
WH, BK, SN, CP, CH, PB

RING/TRIM FINISHES: WH=White BK=Black SN=Satin Nickel CP=Copper CH=Chrome PB=Polished Brass BZ=Bronze
BAFFLE FINISHES: W=White P=Black SN=Satin Nickel CP=Copper BZ=Bronze
REFLECTOR FINISHES: CL=Chrome RG=Gold W=White MB=Black CP=Copper SN=Satin Nickel






B676 _____
REFLECTOR W/ FROSTED LENS

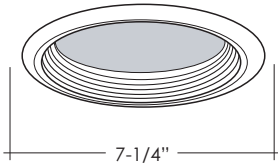

FOR WET LOCATION


MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB

B225 _____
OPEN TRIM STEPPED BAFFLE

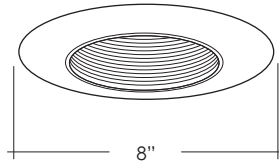


MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30,
50W PAR30, 45W PAR38
BAFFLE:
W, P
RING:
WH

B653 _____
BAFFLE WITH BAFFLE

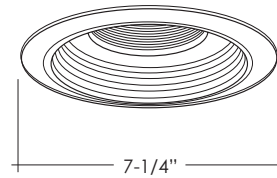


MAX. LAMP WATT:
50W R20, 50W PAR20, 50W BR20
BAFFLE:
W, P
RING:
WH, BK, SN, CP, CH, PB

B651 _____
PAR20 STEPPED BAFFLE

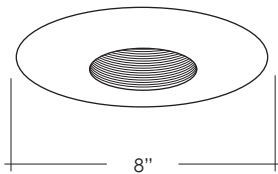


MAX. LAMP WATT:
50W R20, 50W PAR20, 50W BR20
BAFFLE:
W, P, SN, CP
RING:
WH, BK

B611 _____
PAR30 BAFFLE WALL WASH

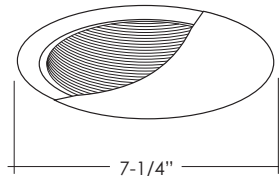


MAX. LAMP WATT:
50W R20, 50W PAR30, 45W BR30
BAFFLE:
W, P, SN, CP
WALL WASH COVER:
WH, BK

B647 _____
DESIGNER BAFFLE WALL WASH

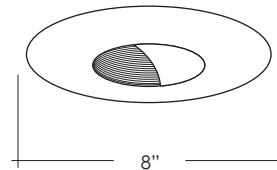

MAX. LAMP WATT:
35W PAR20, 30W R20, 30W BR20
BAFFLE:
W, P, SN, CP
WALL WASH COVER:
WH, BK

B624 _____
CONE REFLECTOR
W/ BAFFLE
WALL WASH



MAX. LAMP WATT:
40W A19
BAFFLE: W, P **REFLECTOR:** CL, RG
WALL WASH COVER:
WH, BK

RING/TRIM FINISHES: WH=White BK=Black SN=Satin Nickel CP=Copper CH=Chrome PB=Polished Brass BZ=Bronze
BAFFLE FINISHES: W=White P=Black SN=Satin Nickel CP=Copper BZ=Bronze
REFLECTOR FINISHES: CL=Chrome RG=Gold W=White MB=Black CP=Copper SN=Satin Nickel

