

L7X/L7XR L7XLED T24/ L7XRLED T24



Intended Use

Recessed incandescent housings for 2x8 new construction (L7X and L7XLED T24) or remodel (L7XR and L7XRLED T24) applications. Approved for direct burial in insulation and all ceiling and wiring types.

Features

- Recessed housing rated IC/NON-IC for new construction or remodel applications
- L7X and L7XLED T24: Air-tight, galvanized steel pan with aluminum can and junction box
- L7XR and L7XRLED T24: Air-tight, aluminum housing with heavy-gauge galvanized steel raceway arm utilizing remodel clips for installation in plaster, sheetrock or mechanical ceilings

- Retaining clips are riveted to top of reflector to hold trim inside housing
- Two side-mounted torsion springs on the trim and two receiving brackets in the can ensure a tight fit
- Suitable for ceilings up to 1-1/2" thick
- 120V applications
- Compatible with Acculamp™ LED lamps; see pages 1044-1049 for options

Listings

UL Listed to U.S. and Canadian safety standards.






Example: L7X 7B2W TOR










ORDERING INFORMATION

Specifications subject to change.

Series	Reflector	Options
L7X New construction rough-in	Choose reflector below. Torsion springs will be designated with a TOR in the nomenclature. Riveted clips will have no designation. Housing and reflector may be ordered separately. ²	PHC Poke-home wire connectors
L7XR Remodel rough-in		GSKT Foam gasketing aids in airtight installation
L7XLED T24 New construction rough-in LED base (see p. 469 for 6" LED module options)		
L7XRLED T24 Remodel rough-in LED base (see p. 469 for 6" LED module options)		

IC/NON-IC Rated Full Reflectors: All reflectors are damp location listed. Lensed reflectors are wet location listed. Lamp type and maximum wattages are listed for each trim. White flange standard, except as noted.

Open wide flange	Open narrow flange	Open deep narrow flange	Open top shallow wide flange - economy	Baffle narrow flange	Baffle deep narrow flange
703 TOR White 	702 TOR White 702 PF White, white plastic flange 702MW TOR Matte white 702BN TOR Brushed nickel ¹ 702ORB TOR Oil-rubbed bronze ¹ 702A R24 Clear diffuse, white plastic flange 702AZ Clear specular, white plastic flange 702A PFMW TOR Clear diffuse, matte white plastic flange	705 White 705 PF White, white plastic flange 705MW TOR Matte white 705A Clear diffuse, white plastic flange 705AZ Clear specular, white plastic flange	7X1 MW TOR Matte white open top 	7B2 TOR Black, white flange 7B2 TRMW TOR Black, matte white flange 7B2MW TOR Matte white 7B2W TOR White 7B2W PF TOR White, white plastic flange 7B2BN TOR Brushed nickel ¹ 7B2ORB TOR Oil-rubbed bronze ¹	7B5 Black, white flange 7B5 TRMW TOR Black, matte white flange 7B5W PF White, white plastic flange 7B5W White 7B5MW TOR Matte white 
IC 75 PAR30 65 BR30	IC 65 BR30 75 PAR30	NON-IC 120 PAR38 120 BR40	IC 75 PAR30 (short neck) 65 BR30	IC 65 BR30 75 PAR30	NON-IC 120 BR40 120 PAR38

Baffle wide flange	Baffle open top shallow wide flange - economy	Eyelid wallwash	Eyeball	Shielded wallwash	Shielded pinhole	Polycarbonate lens	WETlite™	Glass lens
7B3 TOR Black, white flange 7B3W TOR White 	7XB1MW TOR Matte white baffle open top 	7W1 White 7W1MW Matte white 	25° Vertical tilt 7E1 TOR White 7E1MW TOR Matte white 7E1BN TOR Brushed nickel ¹ 7E1ORB TOR Oil-rubbed bronze ¹ 	7W1 White 7W1MW Matte white 	CS1 White 	7LD1 Drop opal ¹ 	6H20 TOR White 6H20BN TOR Brushed nickel ¹ 6H20ORB TOR Oil-rubbed bronze ¹ 	6LD3 Drop opal 6LF3 Flat white 6L4 Fresnel 6LDB3 Drop opal baffle 6LFB3 Flat white baffle 6LB4 Fresnel baffle 
IC 75 PAR30 65 BR30	IC 75 PAR30 (short neck) 65 BR30	IC 40 A19	IC 65 BR30 75 PAR30	IC 40 A19	IC 40 A19 50 R20 50 PAR20	IC 40 A19	IC 75 PAR30 75 PAR38	IC 75 A19

ADDITIONAL INFORMATION

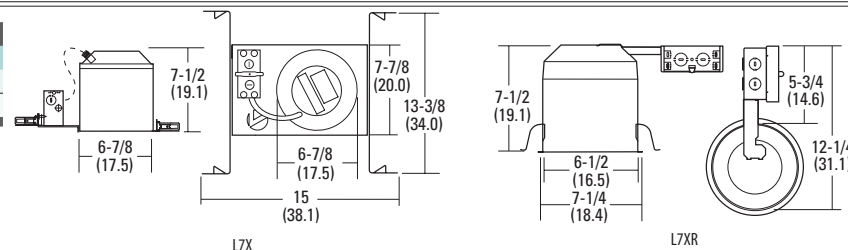
For additional product information, visit www.lithonia.com.

ACCESSORIES

ORDER SEPARATELY

- CTR6 6" goof ring, white
- ATK6 6" air-tight trim kit

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.



Notes

- Flange matches trim finish.
 - 6 and C series trims also compatible trim options.
- Please consult www.lithonia.com for a full listing of Contractor Select products.