

PRODUCT INFORMATION

2BZL4

2'x4'



Intended Use

In a class of its own, Breez™ Series indirect architectural lighting is uniquely enabled by today's LEDs and advanced optical technologies. The graceful gull-wing reflector design and highly-reflective optical coating combine to create a fully-indirect, efficient optical system that is visually intriguing — yet congruous with contemporary minimalist design.

The patent-pending design delivers the spatial balance and visual clarity of volumetric lighting, creating a softer, more comfortable luminous environment by reducing shadows and improving spatial rendering. The optimal balance of horizontal and vertical illumination increases the perceived volume of the space making it ideal for retail, office and institutional applications.

Features

- 2'x4' configuration available in 4000, 4800 or 6000 lumens

- Low profile, 3-5/8" overall height for use in restrictive plenum applications
- No lens, diffuser or refractor to trap bugs or dust
- Fully-indirect LED source eliminates glare and provides a quiet ceiling
- Driver/electrical components are accessible from the floor
- Powder-coated cold-rolled steel, painted after fabrication for durability and consistency in appearance
- Enabled with nLight® technology making the luminaire digitally addressable for communication to other nLight control devices including lumen management

Listings

CSA Certified to meet U.S. and Canadian safety standards. Patents pending. DesignLights Consortium® qualified product.



ORDERING INFORMATION

Specifications subject to change.

Example: 2BZL4 48L D46 LP835 N80

Series	Lumens ²	Voltage	Wattage ³	Color temperature	Controls	Options
2BZL4 LED 2x4 ¹	40L 4000 lumens	(blank) MVOLT (120-277V)	D39 39W	LP830 82 CRI, 3000K ⁴	NX Dimming, no nLight	JP16 Palletized job pack qty. 16
	48L 4800 lumens		D46 46W	LP835 82 CRI, 3500K	BLD Bi-level dimming	
	60L 6000 lumens		D58 58W	LP840 82 CRI, 4000K	N80 nLight with 80% (L80) lumen management N100 nLight without lumen management	

ADDITIONAL INFORMATION


For additional product information, visit www.lithonia.com.

NLIGHT® CONTROL ACCESSORIES:

ORDER AS SEPARATE CATALOG NUMBER. VISIT WWW.SENSORSWITCH.COM/NLIGHT FOR COMPLETE LISTING OF NLIGHT CONTROLS.

WallPod stations	Model number
On/Off	nPODM [color]
On/Off & Raise/Lower	nPODM DX [color]
Graphic Touchscreen	nPOD GFX
Occupancy sensors	Model number
Standard range 360°, ceiling (PIR/dual tech)	nCM 9 / nCM PDT 9
Extended range 360°, ceiling (PIR/dual tech)	nCM 10 / nCM PDT 10
Wide view (PIR/dual tech)	nWV 16 / nWV PDT 16
Photocell controls	Model number
Continuous dimming	nCM ADC
On/Off & Dimming	nCM PC ADC
Cat-5 cable bundles (plenum rated)	Model number
10', CAT5 10FT	CATS 10FT J1
15', CAT5 15FT	CATS 15FT J1

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

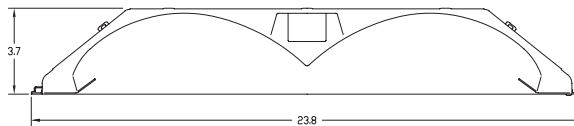

ACCESSORIES

ORDER SEPARATELY

DGA24 Drywall ceiling adaptor, unit installation for 2x4 fixture

Notes

- 1 Air function not available.
- 2 Approximate lumen output.
- 3 Actual wattage may differ by +/- 5% when operating between 120-277V +/- 10%.
- 4 Consult factory for lead time.