


All-Purpose Undercabinet Lights

2UC

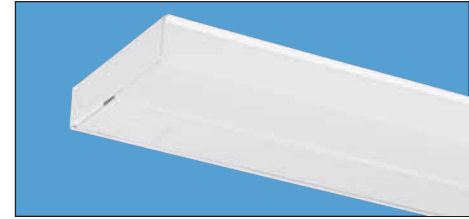

Example: **2UC 30 AR 120 HPF**

Intended Use

For undercabinet or display lighting where a compact luminaire design is required. Provides medium light levels.

Features

All-purpose profile. Available in four lengths. T8 or T12 lamp source.

Fastener-free show surface.

Separate, hingeable service tray for easy installation and maintenance — no tools required for relamping.

Flanged, shatter-resistant, milk-white diffuser.

Gloss-white enamel finish.

Listings

UL Listed (standard). CSA Certified (see Options).

Ordering Information

Series	Lamp type	Diffuser	Voltage	Ballast options	Options
2UC	15 15W T12 (18")	(blank) Standard white	MVOLT	HPF High power factor	SWR Rocker switch, installed ¹
	17 17W T8 (24")	AR High-impact white	120	LPF Low power factor	GLR Internal fast blow fuse ²
	20 20W T12 (24")	OP Opaque front, clear acrylic bottom	277	GEB10IS T8 electronic ballast, instant start	CSW 6' cordset, white ¹
	25 25W T8 (36")		347	GEB10RS T8 electronic ballast, rapid start	CO Grounded convenience outlet ¹
	30 30W T12 (36")		Others available.		RIF1 Radio interference filter (one per fixture)
	32 32W T8 (48")	Not included.			CSA CSA Certified

Availability and Dimensions				
Nominal length	Lamp type	Width in. (cm)	Depth in. (cm)	Length in. (cm)
1½'	15	5¼ (13.3)	1⅜ (4.6)	18¼ (46.4)
2'	17, 20	5¼ (13.3)	1⅜ (4.6)	24¼ (61.6)
3'	25, 30	5¼ (13.3)	1⅜ (4.6)	36¼ (92.1)
4'	32	5¼ (13.3)	1⅜ (4.6)	48¼ (122.6)

NOTES:
 1 120V only.
 2 Must specify voltage



Low-Profile Undercabinet Lights

UC



Example: **UC 33 OP 120 CSW**

Intended Use

Use under cabinets in school, display or residential applications. Delivers medium light levels in a compact design.

Features

Trim, low-profile design. Available in five lengths. T5 lamp source.

Separate, hingeable service tray for easy installation and maintenance — no tools required for relamping.

Factory-installed starters on all preheat models.

Romex conduit connector provided with each fixture.

Snap-fit, shatter-resistant, milk-white acrylic diffuser design with 15% DR.

Listings

UL Listed (standard). CSA Certified (see Options).

Ordering Information

Series	Lamp type ¹	Diffuser	Voltage	Options
UC	12 One 8W T5 (12")	(blank) White	120	GLR Internal fast blow fuse
	21 One 13W T5 (21")	OP Opaque front, clear acrylic bottom	277	CSW 6' cordset ²
	24 Two 8W T5 (24")		Others available.	LPWW Warm white 3000°K T5 lamp(s), installed
	33 One 8W T5 and one 13W T5 (33")			CO Grounded convenience outlet ²
	42 Two 13W T5 (42")	Not included.		SWR Rocker switch, installed ²
				CSA CSA Certified

Availability and Dimensions				
Nominal length	Lamp type	Width in. (cm)	Depth in. (cm)	Length in. (cm)
1'	8	5 (12.7)	1⅜ (3.0)	12⅜ (31.4)
1¾'	13	5 (12.7)	1⅜ (3.0)	21⅜ (52.2)
2'	8 (2)	5 (12.7)	1⅜ (3.0)	24½ (62.3)
2¾'	8, 13	5 (12.7)	1⅜ (3.0)	33½ (85.1)
3½'	13 (2)	5 (12.7)	1⅜ (3.0)	42½ (108.0)

NOTES:
 1 For instant-on ballast, add E after fixture length. Example: UC33EOP120CSW
 2 120V only.

