


STEP 1 Choose a Lamp & Lampholder

Wedge Base

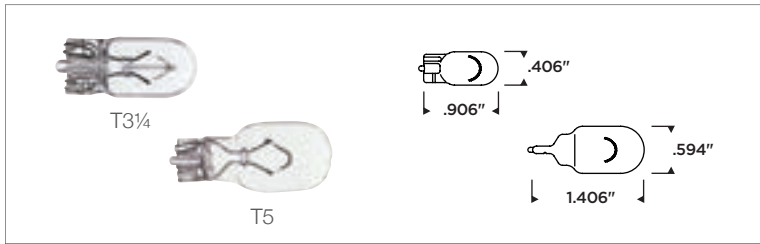

Ambiance Lx Wedge Base Lamps provide illumination for a varied list of applications. Where maximum illumination is required, couple high wattage incandescent or xenon wedge base lamps with the Lx Lampholder (9433). Lx Wedge Base Lamps add another level of versatility to Ambiance Lighting Systems.


NOTE: Lamps in first chart below only compatible with Wedge Base Lampholder 9433 (page 15).
Lamps in second chart below only compatible with Two Light Wedge Base Lampholder 9428 (page 15).

Item Number	9774	9775	9776	9777	9778
Lamp Type	T5 Xenon		T5 Incandescent		
Color Temperature	2800°K	2800°K	2650°K	2750°K	2800°K
Voltage	12V AC	24V AC	12V AC	12V AC	12V AC
Rated Watts	18 watts	18 watts	8 watts	12 watts	18 watts
Power Consumption	16.2 watts	16.2 watts	8 watts	11.6 watts	16.2 watts
Lumens	210	210	57	120	210
Efficacy	13 lm/w	13 lm/w	7 lm/w	10 lm/w	13 lm/w
Rated Average Life	10,000 hours	2,000 hours	2,500 hours	2,000 hours	2,000 hours
Lamp Base	Wedge				
Min. Spacing	6" on center				
Color Rendering Index	>90 CRI				
Dimmable	Yes				

Item Number	9727	9728	9729	9731	9732
Lamp Type	T3 1/4 Incandescent			T3 1/4 Xenon	
Color Temperature	2200°K	2300°K	2450°K	2400°K	2550°K
Voltage	12V AC	12V AC	12V AC	12V AC	12V AC
Rated Watts	3 watts	5 watts	5 watts	3 watts	5 watts
Power Consumption	2.1 watts	4 watts	3.9 watts	2.7 watts	4.2 watts
Lumens	8	23	26	15	33
Efficacy	4 lm/w	6 lm/w	7 lm/w	6 lm/w	8 lm/w
Rated Average Life	20,000 hours	9,000 hours	2,000 hours	19,000 hours	8,000 hours
Lamp Base	Wedge				
Min. Spacing	2" on center				
Color Rendering Index	>90 CRI				
Dimmable	Yes				

STEP 1 Choose Disks & Lamps

Individual Xenon Disk Lights*

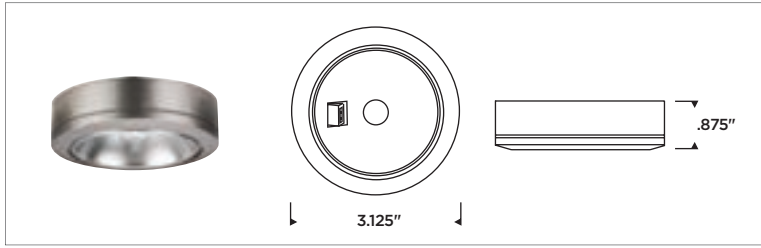

Ambiance Disk Lighting offers functional and low-profile lighting, while enhancing the appeal of any space. Disk lights easily install as surface mount or recessed for a lower profile. Optional trims are also available for a variety of lighting effects and glare reduction. Ambiance Disk Lights should be used with a Class II transformer, or a Class I transformer with our Fused Plug (9488), track, and cable.

Item Number	9485(-xx)	9858(-xx)
Reflector	Multi-faceted polished aluminum	Satin aluminum
Beam Spread	NFL 24°, Accent	FL 40°, Task
Voltage	12V and 24V	
Lamp Type	T5 Wedge	
Max. Wattage	(1) 18 watt incandescent or xenon	
Certification (Optional lens not required for listing)	cETL, damp location	
Included Accessories	36" 18/2 cord, surface mount ring and mounting screws	80" 18/2 cord & plug, surface mount ring and mounting screws
Material / Finish	(-12) Black, (-15) White, (-171) Bronze and (-962) Brushed Nickel Low-profile, polycarbonate housing	



Black



White



Antique
Bronze



Brushed
Nickel

* For pre-packaged kits, see page 46.

Lamping Options

Item Number	9774	9775	9776	9777	9778
Lamp Type	T5 Xenon	T5 Xenon	T5 Incandescent	T5 Incandescent	T5 Incandescent
Color Temperature	2800°K	2800°K	2650°K	2750°K	2800°K
Voltage	12V AC	24V AC	12V AC	12V AC	12V AC
Rated Watts	18 watts	18 watts	8 watts	12 watts	18 watts
Power Consumption	16.2 watts	16.2 watts	8 watts	11.6 watts	16.2 watts
Lumens	210	210	57	120	210
Efficacy	13 lm/w	13 lm/w	7 lm/w	10 lm/w	13 lm/w
Rated Average Life	10,000 hours	2,000 hours	2,500 hours	2,000 hours	2,000 hours
Lamp Base	Wedge				
Min. Spacing	6" on center				
Color Rendering Index	>90 CRI				
Dimmable	Yes				

STEP 1 Choose Housing & Lamps

Non-IC Housing with Trim

MRC11 Housing with Eyeball Trim

Wattage: 20w max. MRC11 GU4 Bi-Pin.
Select from the following lamps: 9787, 9789, 97004 (sold separately).
Die-cast aluminum housing with powdercoat finish. 12 and 24V. Wet location listed (12V only).



Part Number	Finish	Dimensions
9424-12	Black	D: 2.75" H: 3.25"
9424-15	White	D: 2.75" H: 3.25"

MRC11 Housing with Trim

Wattage: 20w max. MRC11 GU4 Bi-Pin.
Select from the following lamps: 9787, 9789, 97004 (sold separately).
Die-cast aluminum housing with powdercoat finish. 12 and 24V. Wet location listed (12V only).



Part Number	Finish	Dimensions
9426-12	Black	D: 2.75" H: 3.25"
9426-15	White	D: 2.75" H: 3.25"

Non-IC Housing without Trim

T3 Housing

Wattage: 20w max. T3 G4 Bi-Pin.
Uses lamp: 9784 (sold separately).
Die-cast aluminum housing with powdercoat finish. 12 volt only. Wet location listed.
Requires trim 9357.



Part Number	Finish	Dimensions
9412-12	Black	D: 2.75" H: 3.25"
9412-15	White	D: 2.75" H: 3.25"

T5 Housing

Wattage: 18w max. T5 Wedge Base.
Select from the following lamps: 9774, 9775, 9776, 9777, 9778 (sold separately).
Die-cast aluminum housing with powdercoat finish. 12 and 24V. Wet location listed (12V only). Can use trim 9357.



Part Number	Finish	Dimensions
9409-12	Black	D: 2.75" H: 3.25"
9409-15	White	D: 2.75" H: 3.25"

Lamps

Item Number	9787	9789	97004	9784
Lamp Type	MRC11 Halogen	MRC11 Halogen	MRC11 Halogen	T3 Halogen
Color Temperature	3000°K	3000°K	3000°K	2850°K
Voltage	12V AC	12V AC	24V AC	12V AC
Rated Watts	20 watts	20 watts	20 watts	20 watts
Lumens	10	30	30	320
Rated Average Life	2,000 hours	2,000 hours	2,000 hours	2,000 hours
Lamp Base	GU4 Bi-Pin			G4 Bi-Pin
Compatible Housing	9424(-xx) and 9426(-xx)			9412(-xx)



9787, 9789, 97004



9784








Item Number	9774	9775	9776	9777	9778
Lamp Type	T5 Xenon	T5 Xenon	T5 Incandescent	T5 Incandescent	T5 Incandescent
Color Temperature	2800°K	2800°K	2650°K	2750°K	2800°K
Voltage	12V AC	24V AC	12V AC	12V AC	12V AC
Rated Watts	18 watts	18 watts	8 watts	12 watts	18 watts
Lumens	210	210	57	120	210
Rated Average Life	10,000 hours	2,000 hours	2,500 hours	2,000 hours	2,000 hours
Lamp Base	Wedge				
Compatible Housing	9409(-xx)				







9774, 9775, 9776, 9777, 9778

Lamp Reference Chart

12 VOLT

Lamp Image	Item Number	Description	Lamp Type	Lamp Base	Watts Rated
	96116S-32	clear LED festoon 2700K	T3	Festoon	0.708
	96116S-33	frosted LED festoon 2700K	T3	Festoon	0.708
	96118S-32	clear LED festoon 3000K	T3	Festoon	0.633
	96118S-33	frosted LED festoon 3000K	T3	Festoon	0.633
	96119S-32	clear LED festoon 4000K	T3	Festoon	0.661
	96119S-33	frosted LED festoon 4000K	T3	Festoon	0.661
	97118-32	5w clear xenon festoon	T3	Festoon	5
	97118-33	5w frosted xenon festoon	T3	Festoon	5
	97119-32	10w clear xenon festoon	T3	Festoon	10
	97119-33	10w frosted xenon festoon	T3	Festoon	10
	9727	3w clear incandescent wedge	T3 1/4	Wedge	3
	9728	5w clear incandescent wedge	T3 1/4	Wedge	5
	9729	5w clear incandescent wedge	T3 1/4	Wedge	5
	9731	3w clear xenon wedge	T3 1/4	Wedge	3
	9732	5w clear xenon wedge	T3 1/4	Wedge	5
	9774	18w clear xenon wedge	T5	Wedge	18
	9776	8w clear incandescent wedge	T5	Wedge	8
	9777	12w clear incandescent wedge	T5	Wedge	12
	9778	18w clear incandescent wedge	T5	Wedge	18
	9787	20w clear halogen MRC11 bi-pin	MRC11	GU4 Bi-Pin	20
	9789	20w clear MRC11 halogen bi-pin	MRC11	GU4 Bi-Pin	20
	97305S	6w clear LED MR16 3000K	MR16	GU5.3	5.75
	97405S	6w clear LED MR16 2700K	MR16	GU5.3	5.52
	97505S	6w clear LED MR16 4000K	MR16	GU5.3	5.81
	9784	20w clear halogen T3 bi-pin	T3	G4 Bi-Pin	20

24 VOLT

Lamp Image	Item Number	Description	Lamp Type	Lamp Base	Watts Rated
	96117S-32	clear LED festoon 2700K	T3	Festoon	0.708
	96117S-33	frosted LED festoon 2700K	T3	Festoon	0.708
	96120S-32	clear LED festoon 3000K	T3	Festoon	0.633
	96120S-33	frosted LED festoon 3000K	T3	Festoon	0.633
	96121S-32	clear LED festoon 4000K	T3	Festoon	0.661
	96121S-33	frosted LED festoon 4000K	T3	Festoon	0.661
	97120-32	5w clear xenon festoon	T3	Festoon	5
	97120-33	5w frosted xenon festoon	T3	Festoon	5
	97121-32	10w clear xenon festoon	T3	Festoon	10
	97121-33	10w frosted xenon festoon	T3	Festoon	10
	97122-33	7w frosted xenon festoon	T3	Festoon	7
	9775	18w clear xenon wedge	T5	Wedge	18
	97004	20w MRC11 halogen	MRC11	GU4 Bi-Pin	20