

UL-3R Enclosures

ENCAPSULATED SINGLE PHASE, .05 to .150 kVA



FEATURES

- **UL listed, CSA certified and UL-3R enclosure** meets or exceeds all listing criteria including NEMA, ANSI and OSHA standards.
- **Easy and convenient installation** to meet your requirements, the transformer can be mounted in any position.
- **Long Life** UL class 130°C insulation system. Transformers can be banked for three phase service.
- **Large wiring compartment**, no conduit or pull boxes required. Front access for wiring ease. Wiring compartment remains cool.
- **Completely enclosed** UL-3R enclosure for indoor/outdoor service. Rugged non-ventilated construction.
- **Plenty of knockouts** for multi-directional entry.
- **All copper lead wire terminations.**
- **Ground studs** for use with non-metallic conduit.


ENCAPSULATED SINGLE PHASE, .250 to 25 kVA



FEATURES

- **UL listed, CSA certified and UL-3R enclosures** meets or exceeds all listing criteria including NEMA, ANSI and OSHA standards.
- **Shielded** for cleaner power.
- **Encapsulated and completely enclosed design** electrical grade silica and resin compounds completely enclose the core and coil to seal out all moisture and air. UL Type 3R enclosure for indoor or outdoor service. Encapsulation eliminates corrosion and insulation deterioration.
- **Quiet operation** with sound levels well below NEMA standards.
- **Long life** UL class 155°C insulation system. 115°C rise thru .750 kVA; 180°C insulation system, 115°C rise, 1 kVA and above.

- **Installation** keyhole mounting slots for mounting bolts prior to installation. Mounting slots are accessible from the front. Lifting ears are included on 3 to 25 kVA units.
- **Wiring** flexible copper leadwire terminations for easy connections outside the front access wiring compartment. Dual size knockouts in both sides and the bottom of the wiring compartment for greater wiring convenience and flexibility.

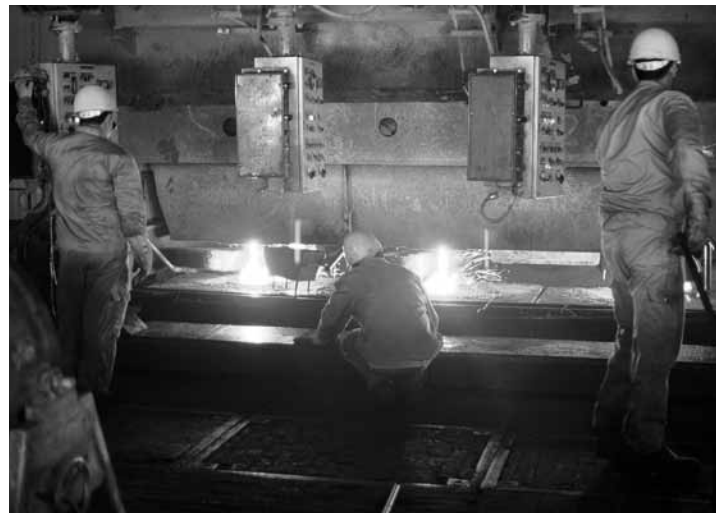

Shielded Power in Many Design Styles

ENCAPSULATED THREE PHASE 3 to 75 kVA



FEATURES

- **UL listed, CSA certified and UL-3R enclosure** meets or exceeds all listing criteria including NEMA, ANSI and OSHA standards.
- **UL Class 180°C** insulation system. 115°C rise.
- **Extra large front access wiring compartment** through 9 kVA; top access through 75 kVA for easier installation and cooler case temperatures.
- **Completely enclosed** — suitable for indoor/outdoor service. Consult selection charts for details. Excellent for dust or lint laden atmosphere.
- **Encapsulated** — electrical grade silica and resin compound completely encloses the core and coil. Encapsulation seals out all moisture and air, eliminating corrosion and insulation deterioration.
- **High efficiency** and excellent regulation.
- **Sound levels** below NEMA standards.
- **Keyhole mounting slots** permit installation of mounting bolts prior to hanging transformer and are accessible from the front. Lifting ears for easy installation.
- **Wiring connections** can be made outside of wiring compartment due to the use of flexible leads.
- **3-9 kVA** provided with dual size knockouts in sides and bottom of wiring compartment.
- **Termination** — copper lead wire.
- **Electrostatic shielding** provided on all 60 Hz isolation transformers.

NOTE: Units above 15 kVA apply to Groups F and K.

316 STAINLESS STEEL TRANSFORMERS

FEATURES

- 3R enclosure.
- Encapsulated construction.
- Single phase: 0.25 – 25 kVA.
Three phase: 3 – 7.5 kVA.
- Core and Coil assembly completely encapsulated in polyester or epoxy seals out all moisture, eliminating corrosion and deterioration of insulation.
- Electrostatic shielding.

APPLICATIONS

- Harsh industrial locations
- Corrosive chemical exposure
- Waste water treatment facilities
- Coastal or marine applications with high salt mist
- Any application where painted cold roll steel is not adequate



SELECTION CHARTS

SINGLE PHASE

GROUP I



240 X 480 PRIMARY VOLTS — 120/240 SECONDARY VOLTS — FOUR WINDINGS — 1Ø, 60 Hz

KVA	CATALOG NO.	APPROX. DIMENSIONS Inches (cm.)			APPROX. SHIP WEIGHT Lbs. (Kg.)	TYPE MTG. W – Wall F – Floor	KNOCKOUTS Inches (Cm.)	WEATHER SHIELD P/N	Wiring Diagrams & Design Figures Begin on Page 122
		HEIGHT	WIDTH	DEPTH					
① .05	T153004	6.41 (16.3)	3.14 (8.0)	3.05 (7.7)	4 (1.8)	W	0.875 (2.2)	NA	1-A
① .10	T153005	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	5 (2.3)	W	0.875 (2.2)	NA	1-A
① .15	T153006	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	7 (3.2)	W	0.875 (2.2)	NA	1-A
① .25	T253007S	8.68 (22.0)	4.08 (10.4)	3.88 (9.9)	10 (4.5)	W	0.50-0.75 (1.3-1.9)	NA	2-B
① .50	T253008S	9.06 (23.0)	4.37 (11.1)	4.20 (10.7)	15 (6.8)	W	0.50-0.75 (1.3-1.9)	NA	2-B
① .75	T253009S	9.68 (24.6)	4.75 (12.1)	4.50 (11.4)	19 (8.6)	W	0.50-0.75 (1.3-1.9)	NA	2-B
1.00	T253010S	10.50 (26.7)	5.50 (14.0)	5.13 (13.0)	24 (10.9)	W	0.50-0.75 (1.3-1.9)	NA	2-B
1.50	T253011S	11.62 (29.5)	5.50 (14.0)	5.13 (13.0)	30 (13.6)	W	0.50-0.75 (1.3-1.9)	NA	2-B
2.00	T253012S	13.00 (33.0)	5.50 (14.0)	5.13 (13.0)	38 (17.2)	W	0.50-0.75 (1.3-1.9)	NA	2-B
3.00	T253013S	11.50 (29.2)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	W	0.75-1.25 (1.9-3.2)	NA	2-C
3.00	T2530134S	11.50 (29.2)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	W	0.75-1.25 (1.9-3.2)	NA	3-C
5.00	T253014S	14.38 (36.5)	10.31 (26.2)	7.13 (18.1)	75 (34.0)	W	0.75-1.25 (1.9-3.2)	NA	2-C
5.00	T2530144S	14.38 (36.5)	10.31 (26.2)	7.13 (18.1)	75 (34.0)	W	0.75-1.25 (1.9-3.2)	NA	3-C
7.50	T2535153S	15.19 (38.6)	13.50 (34.3)	10.84 (27.5)	115 (52.2)	W	0.75-1.25 (1.9-3.2)	NA	4-D
10.00	T2535163S	15.19 (38.6)	13.50 (34.3)	10.84 (27.5)	125 (56.7)	W	0.75-1.25 (1.9-3.2)	NA	4-D
15.00	T2535173S	16.94 (43.0)	14.12 (35.9)	11.59 (29.4)	170 (77.1)	W	1.00-1.50 (2.5-3.8)	NA	4-D
25.00	T2535183S	18.44 (46.8)	16.13 (41.0)	13.34 (33.9)	250 (113.0)	W	1.00-1.50 (2.5-3.8)	NA	4-D
37.50	TP530193S	25.50 (64.8)	24.39 (61.9)	19.37 (49.2)	280 (127.0)	F②	NA	WSA1	5-E
50.00	TP530203S	25.50 (64.8)	24.39 (61.9)	19.37 (49.2)	350 (158.8)	F②	NA	WSA1	5-E
75.00	TP530213S	35.47 (90.1)	31.90 (81.0)	26.88 (68.3)	430 (195.0)	F	NA	WSA3	5-E
100.00	TP530223S	41.52 (105.5)	32.90 (83.6)	29.87 (75.9)	525 (238.0)	F	NA	WSA4	5-E
167.00	TP530233S	45.60 (115.8)	39.50 (100.3)	35.50 (90.2)	1050 (476.3)	F	NA	WSA5	5-E
250.00	TP530243S	45.60 (115.8)	39.50 (100.3)	35.50 (90.2)	1440 (653.2)	F	NA	WSA5	5-E

Notes: 0.05 through 25.0 kVA encapsulated (exempt from TP1), 37.5 through 250.0 kVA TP1 compliant

GROUP I-316SS

316 STAINLESS STEEL

240 X 480 PRIMARY VOLTS — 120/240 SECONDARY VOLTS — FOUR WINDINGS — 1Ø, 60 Hz

KVA	CATALOG NO.	APPROX. DIMENSIONS Inches (Cm.)			APPROX. SHIP WEIGHT Lbs. (Kg.)	TYPE MTG. W – Wall F – Floor	KNOCKOUTS Inches (Cm.)	WEATHER SHIELD P/N	Wiring Diagrams & Design Figures Begin on Page 122
		HEIGHT	WIDTH	DEPTH					
0.25	T253007SS	8.68 (22.0)	4.08 (10.4)	3.88 (9.9)	10 (4.5)	W	NA	NA	2-B
0.50	T253008SS	9.06 (23.0)	4.37 (11.1)	4.20 (10.7)	15 (6.8)	W	NA	NA	2-B
0.75	T253009SS	9.68 (24.6)	4.75 (12.1)	4.50 (11.4)	19 (8.6)	W	NA	NA	2-B
1.00	T253010SS	10.50 (26.7)	5.50 (14.0)	5.13 (13.0)	24 (10.9)	W	NA	NA	2-B
1.50	T253011SS	11.62 (29.5)	5.50 (14.0)	5.13 (13.0)	30 (13.6)	W	NA	NA	2-B
2.00	T253012SS	13.00 (33.0)	5.50 (14.0)	5.13 (13.0)	38 (17.2)	W	NA	NA	2-B
3.00	T253013SS	11.50 (29.2)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	W	NA	NA	3-C
5.00	T253014SS	14.38 (36.5)	10.31 (26.2)	7.13 (18.1)	75 (34.0)	W	NA	NA	3-C
7.50	T253515SS	15.19 (38.6)	13.50 (34.3)	10.84 (27.5)	115 (52.2)	W	NA	NA	4-D
10.00	T253516SS	15.19 (38.6)	13.50 (34.3)	10.84 (27.5)	125 (56.7)	W	NA	NA	4-D
15.00	T253517SS	16.94 (43.0)	14.12 (35.9)	11.59 (29.4)	170 (77.1)	W	NA	NA	4-D
25.00	T253518SS	18.44 (46.8)	16.13 (41.0)	13.34 (33.9)	250 (113.0)	W	NA	NA	4-D

Notes: 0.25 through 25.0 kVA encapsulated (exempt from TP1)

① Suitable for 50/60 Hz.

② Wall mounting brackets are available for these sizes, refer to page 133.