



XENON TASK LIGHT



SCHEMATICS:

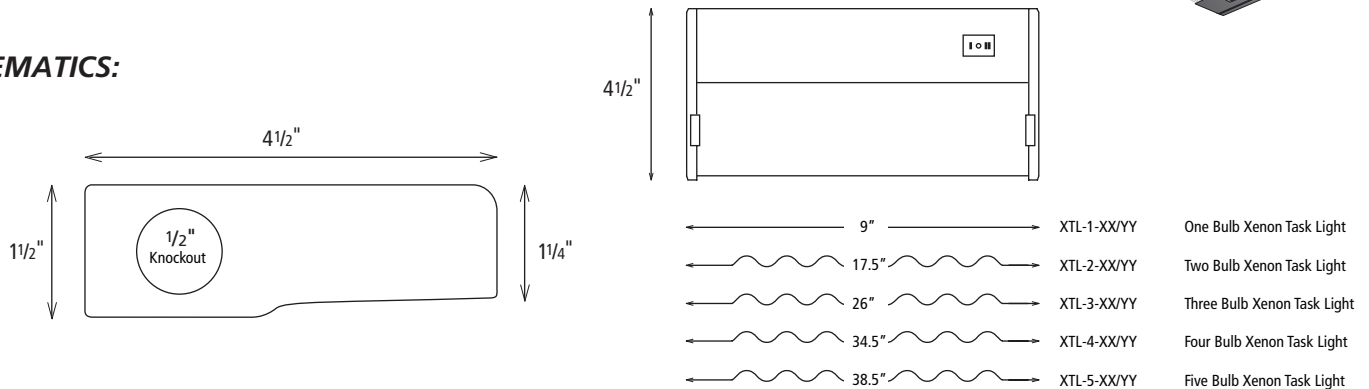

DESCRIPTION:

Completely self-contained under counter light fixture with 10,000 hour Xenon bulbs included. 110VAC in and out up to 66 bulbs. Numerous contractor preferred 1/2" knockouts in each fixture. Offered in five sizes and six fixture finishes. UL Listed Damp Location.

APPLICATIONS

- ▶ Under-cabinet task light
- ▶ Work stations
- ▶ Over-cabinet accent light
- ▶ Laboratories
- ▶ Display cases and exhibits
- ▶ Merchandising
- ▶ Indirect accent light
- ▶ Wall units and bars

FEATURES

- ▶ Integral 12V electronic transformer in each fixture
- ▶ Light, efficient aluminum frame stamped for 110V hard wire input
- ▶ Thin 1.25" deep design hides easily under most cabinets
- ▶ Push-in connectors included for ease of power input
- ▶ Fixture Lengths:
 - 1-bulb: 9"
 - 2-bulb: 17.5"
 - 3-bulb: 26"
 - 4-bulb: 34.5"
 - 5-bulb: 38.5"
- ▶ Frosted glass diffuser with simple hinged push-to-open lens requires no tools to relamp
- ▶ Captive screw mounting
- ▶ Available in 6 colors: Aluminum, Black, Bronze, Copper, Polished Brass and Powder White
- ▶ 10,000-hour average bulb life
- ▶ Hi-lo dimmer switch
- ▶ Bulb replacement has low voltage safety

ORDERING LOGIC:

XTL-Z-XX/YY

Z = NUMBER OF BULBS

1, 2, 3, 4, 5

XX = TYPE

HW = Hard Wire
PC = Power Cord

YY = FIXTURE FINISH

WH = White
BZ = Bronze
AL = Aluminum
CP = Cooper
PB = Polished Brass
BK = Black

SPECIFICATIONS:

Voltage	110V input to fixture via hardwire or power cord. Integral 12V transformer per fixture
Bulb Specifications	18W wedge base Xenon (1-,2-, 3-, 4- or 5-bulb fixtures)
Average Bulb Life	10,000 hours
Fixture Finish	White or black powder coating; bronze, copper or polished brass anodized, or natural aluminum
Packaging	Individually packaged in 2-color corrugated box, J-rack compatible
Construction	Aluminum extruded frame with injection molded sides for weight efficiency and consistency of finish
Lens	Frosted glass. Hinged to aluminum frame.
Wiring Options	Hardwire or power cord options. Hardwire option can be parallel wired ("daisy chained") up to 1188 watts (66 bulbs). One wire between each fixture completes chain. No custom cord required. Check local code and NEC.
Agency Approval	UL listed and labeled. Damp Location



PROJECT:	TYPE:
NOTES:	