



# BC26 Universal Beam Clamp with Tapped Hole – BC260025EG



- One thru-hole for easier installation of threaded rod
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 19 and 23)

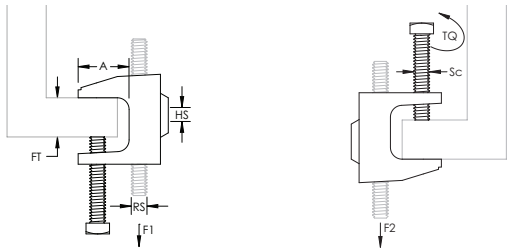

Part Number	BC260025EG
Material	Cast Iron
Finish	Electrogalvanized
Rod Size (RS)	1/4"
Flange Thickness (FT)	13/16" Max
A	13/16"
Hole Size (HS)	1/4"
Hole Type	Threaded
Screw Diameter (Sc)	1/4"
Torque (TQ)	4 ft lb
Static Load 1 (F1)	250 lb
Static Load 2 (F2)	100 lb
Certifications	cULus
Standard Packaging Quantity	100 pc
UPC	78285634025

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.

ANSI is a registered trademark of American National Standards Institute. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

#### WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2018 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

