


Meter Centers

Uni-PAK Metering: WEP Ringstyle EUSERC

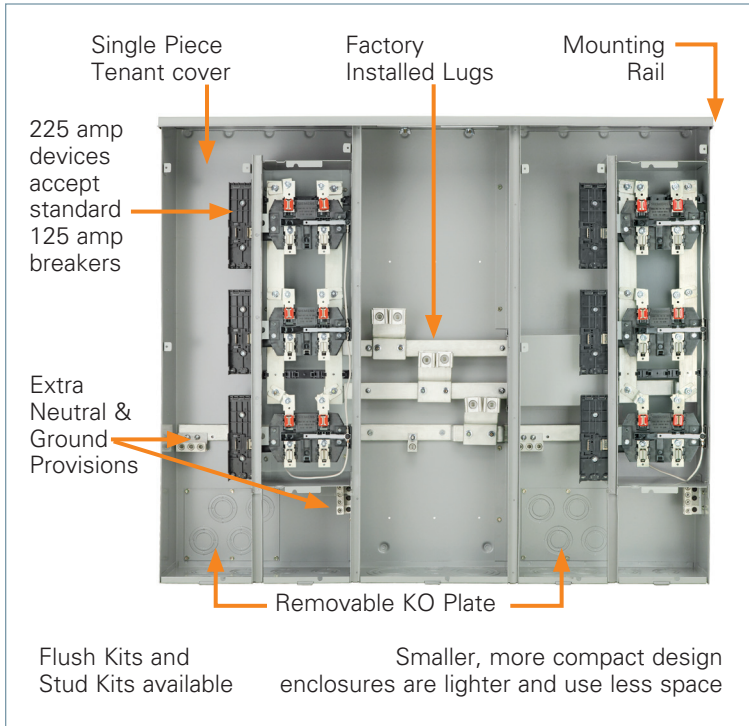

Features

- Individual split covers
- UL Listed for 60 / 75°C conductors. See equipment markings for applications
- For small apartment buildings, small professional and commercial buildings
- Completely self-contained meter centers
- Two to six 125A and 225A breaker positions
- Outdoor surface mounted enclosures
- Semi flush with applicable field installed kit
- Compact, pre-bussed, easy to handle, hang and wire
- Barrired, sealable compartment for unmetred current-carrying parts
- Al/Cu lay-in lugs, except two socket units
- Top or bottom feed
- Bottom and rear branch wiring exits (Neutral and ground at bottom only)
- ANSI #61 light gray electrodeposited paint on zinc-coated G90 steel
- Meets EUSERC specifications when NEMA stud kit and flushing ring (if required) is field added. Compression lugs, if required, are sold separately.

EUSERC Compliant Ring Style Uni-PAK 120/240V 1 Phase, 3 Wire

Max. Tenant Main	Bus Amperage	Meter Positions Per Pak	Catalog Number	Breaker Provision	Max. AIC	Dimensions ^①			5th Jaw Assembly	Line Lugs Wire Range	Semi-Flush Kit #	EUSERC Drawing #342 ^②
						Height	Width	Depth				
125	200	2	WEP2211	QP, QPH, HQP, MP-T, MP-HT, MP-MT	65,000	32.52	13.80	7.56	ECMF5 6:00 or 9:00	#6-300 kcmil	WPFK1	figure 1
	300	3	WEP3311			38.75				#2-600 kcmil	WPFK2	
	400	4	WEP4411			47.75	25.42			1/0-750 kcmil CU-AL or (2) 1/0-250 AL or (2) 1/0-3/0 CU	WPFK3	figure 3
		5	WEP4511			38.75	38.94					
	500	4	WP5411			47.75	31.28			(2) #2-600 kcmil	WPFK4	
	400	6	WEP4611			38.75	44.82				WPFK5	
600	5	WEP6511										
	600	6	WEP6611									
225	400	2	WEP4212	QP, QPH, HQP, MP-T, MP-HT, MP-MT, QS, QSH, QSHH, HQS, HQSH	100,000	29.75	28.53	7.56	ECMF5 6:00 or 9:00	1/0-750 kcmil CU-AL or (2) 1/0-250 AL or (2) 1/0-3/0 CU	WPFK6	figure 2
		3	WEP4312			38.75				WPFK7		
	600	4	WEP4412			47.75	34.41			(2) #2-600 kcmil	WPFK8	figure 3
		5	WEP6412			38.75	51.04				WPFK9	
		5	WEP6512									
		6	WEP6612									
	800	6	WEP8612 ^②			38.75	51.04			(2) 1/0-750 kcmil or (4) 1/0-250 AL or (4) 1/0-3/0 CU	WPFK10	N/A
	1000		WEP10612 ^②							57.53	(3) #2-500 kcmil	

NEMA Stud Kits

Catalog Number	Amperage	Note
WPSK400	400A	fits 300-400
WPSK600	600A	fits 500-600
WPSK800	800A	—
WPSK1000	1000A	—

^① Dimensions shown are representative of outside box dimensions and do not include allowances for mounting bumps, endwalls, covers, hubs, or hardware protrusions. Dimensions are subject to change.

^② Please note the EUSERC standard currently only covers up to 600 amp devices. Please consult utility prior to installation.