

HR and HM

Specifications

Description: In-line fuse holders for SFE and ¼" dia. x various length fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 32V

Amps: — 20A



Features and benefits

- HR and HM Universal in-line fuse holder for SFE and various length ¼" diameter fuses with #14 lead wires.

Typical applications

- Supplemental, low voltage, low amperage control circuits

Catalog numbers

Catalog numbers	Includes fuse	Wire length and size
HRJ*	SFE-20	19" of #14
HRI	SFE-14	
HRH	SFE-9	
HRE	SFE-7½	
HRG	SFE-6	
HRF	SFE-4	
HMJ**	SFE-20	8" of #14
HMI	SFE-14	
HMH	SFE-9	
HME	SFE-7½	
HMG	SFE-6	
HMF	SFE-4	

* Also available as in-line fuse holder only with lead wire contacts, HRJ-LESS-fuse.

** Also available as in-line fuse holder only with lead wire contacts, HMJ-LESS-fuse.

HHJ-A For ¼" x 1¼" fuse, no wire or fuse included, accepts #18 - #22 wire.


HHJ-B For ¼" x 1¼" fuse, no wire or fuse included, accepts #12 - #16 wire.

HHI-B For ¼" x 1¼" fuse, no wire or fuse included, accepts #12 - #16 wire.

Replacement contacts

Catalog number	Symbol
9838	HHJ-A
9841	HHJ-B

Dimensions - in (mm)

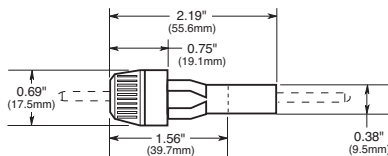

Data Sheet: 2122

HFA



Specifications

Description: In-line water-resistant fuse holders for ¼" x ¼" fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 250V

Amps: — 20A

Refer to data sheet for recommend crimp tools

Catalog numbers

Catalog numbers	Terminals
HFA	Crimp #12 - #16
HFA-HH*	¼" quick connect

*No UL recognition.

Data Sheet: 2115

HHT



Specifications

Description: In-line fuse holders for 5 x 15mm or 5 x 20mm fuses.

Dimensions: See dimensions illustration.

Construction: Black thermoplastic body with brass contacts, wire: 16 AWG, red.

Ratings:

Volts: — 32V

Amps: — 5A (5 x 15mm)

— 10A (5 x 20mm)

Catalog numbers

Catalog number	Fuse size
HHT	5 x 15mm and 5 x 20mm

Data Sheet: 2138