


Guy Strains - Clevis / Clevis

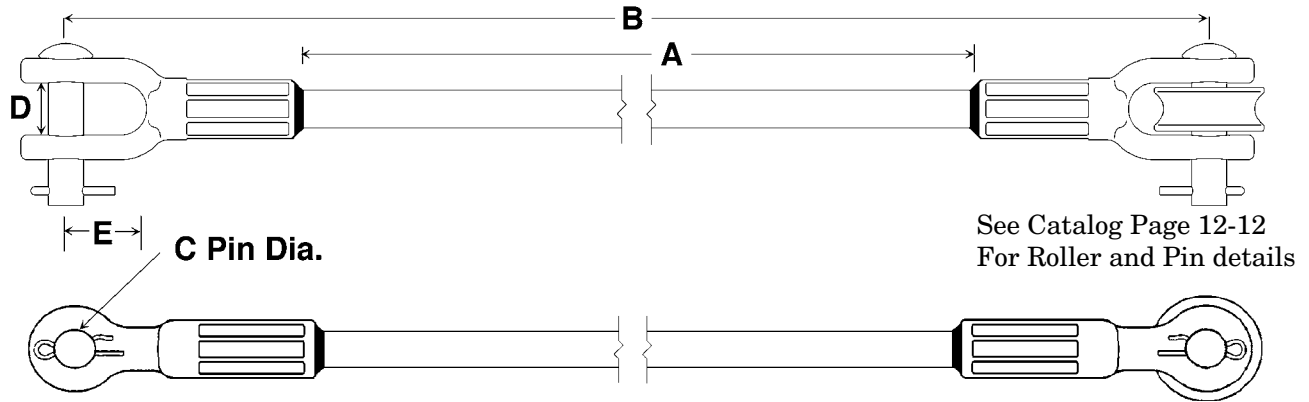

See Note For Roller Configurations

C Dimension is 5/8" (16 mm) for 16,000 lbs. series and 3/4" (19 mm) for 21,000 lbs. series

D Dimension is 0.88" (22 mm) for 16,000 lbs. series and 1" (25 mm) for 21,000 lbs. series

E Dimension is 1.38" (35 mm) for 16,000 lbs. series and 1.88" (48 mm) for 21,000 lbs. series

Castings are hot-dip galvanized ductile iron.

Catalog Number	Length A	Length B	Weight (Each)
16,000 lbs. (7258 kg) Minimum Ultimate Strength - 5/8" (16 mm) Dia. Rod			
GS16012CC1	12" (30.5 cm)	20" (50.8 cm)	2.8 lbs. (1.3 kg)
GS16018CC1	18" (45.7 cm)	26" (66 cm)	2.9 lbs. (1.3 kg)
GS16024CC1	24" (61 cm)	32" (81.3 cm)	3.1 lbs. (1.4 kg)
GS16030CC1	30" (76.2 cm)	38" (96.5 cm)	3.2 lbs. (1.4 kg)
GS16036CC1	36" (91.4 cm)	44" (111.8 cm)	3.3 lbs. (1.5 kg)
GS16042CC1	42" (106.7 cm)	50" (127 cm)	3.5 lbs. (1.6 kg)
GS16054CC1	54" (137.2 cm)	62" (157.5 cm)	3.7 lbs. (1.7 kg)
GS16060CC1	60" (152.4 cm)	68" (172.7 cm)	3.8 lbs. (1.7 kg)
GS16078CC1	78" (198.1 cm)	86" (218.4 cm)	4.2 lbs. (1.9 kg)
GS16096CC1	96" (243.8 cm)	104" (264.2 cm)	4.6 lbs. (2.1 kg)
GS16120CC1	120" (304.8 cm)	128" (325.1 cm)	5.1 lbs. (2.3 kg)
GS16144CC1	144" (365.8 cm)	152" (386.1 cm)	5.7 lbs. (2.6 kg)
21,000 lbs. (9525 kg) Minimum Ultimate Strength - 3/4" (19 mm) Dia. Rod			
GS21012CC1	12" (30.5 cm)	21" (53.3 cm)	4.4 lbs. (2 kg)
GS21018CC1	18" (45.7 cm)	27" (68.6 cm)	4.6 lbs. (2.1 kg)
GS21024CC1	24" (61 cm)	33" (83.8 cm)	4.8 lbs. (2.2 kg)
GS21030CC1	30" (76.2 cm)	39" (99.1 cm)	5 lbs. (2.3 kg)
GS21036CC1	36" (91.4 cm)	45" (114.3 cm)	5.1 lbs. (2.3 kg)
GS21042CC1	42" (106.7 cm)	51" (129.5 cm)	5.3 lbs. (2.4 kg)
GS21054CC1	54" (137.2 cm)	63" (160 cm)	5.7 lbs. (2.6 kg)
GS21060CC1	60" (152.4 cm)	69" (175.3 cm)	5.8 lbs. (2.6 kg)
GS21078CC1	78" (198.1 cm)	87" (221 cm)	6.4 lbs. (2.9 kg)
GS21096CC1	96" (243.8 cm)	105" (266.7 cm)	6.9 lbs. (3.1 kg)
GS21120CC1	120" (304.8 cm)	129" (327.7 cm)	7.6 lbs. (3.4 kg)
GS21144CC1	144" (365.8 cm)	153" (388.6 cm)	8.3 lbs. (3.7 kg)

GS—CC1 series has 1 Roller as detailed in drawing

For 2 Rollers, replace "CC1" in number with "CC2"

For no Rollers, replace "CC1" in number with "CC"