


## CLEVIS, DEADEND

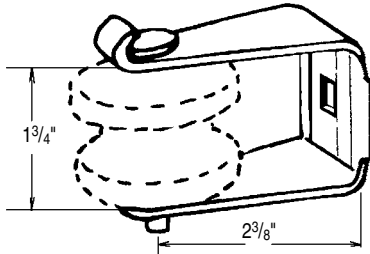

No. H14

There is no need for a cotter pin because the lip on the clevis locks the pin. An elongated slot in the upper arm lets the pin float into position. Steel parts are hot dip galvanized. Wet-process spool insulator is gray Sky-Glaze® color. Shipped unassembled.

Catalog No.	Description	Approx. Ship Wt. Lbs. Per 100 Pcs.
H14	Clevis, with Sq. Hole for 3/8" Carriage Bolts and pin only (insulator not included)	41

## CLEVIS DEADENDING



No. 455

Used for attaching deadend insulators and guys with extension links (Page 5-32). Clevises have 5/8" cotter bolts, except No. 456 which has a 3/4" machine bolt. Hot dip galvanized.

Catalog No.	Dimensions in Inches				Approx. Ship Wt. Lbs. Per 100 Pcs.
	Extension	Mtg. Hole Diameter	Throat Clearance	Steel Size	
455	3 3/4	1 3/16	5/8	3/16 x 1 1/2	98

## CLEVISES, INSULATED (Insulators Not Included)

**NEMA 53-2 PORCELAIN SPOOL INSULATOR**

No. \*461 — Wt. per 100 pcs. 158 lb.

**NEMA 53-2 PORCELAIN SPOOL INSULATOR**

No. \*468 — Wt. per 100 pcs. 132 lb.

**NEMA 53-4 PORCELAIN SPOOL INSULATOR**

No. 469 — Wt. per 100 pcs. 166 lb.

**NEMA 53-1 PORCELAIN SPOOL INSULATOR**

No. PS7820 — Wt. per 100 pcs. 90 lb.

**NEMA 53-3 PORCELAIN SPOOL INSULATOR**

No. \*0340 — Wt. per 100 pcs. 144 lb.

**NEMA 53-1 PORCELAIN SPOOL INSULATOR**

No. \*0341 — Wt. per 100 pcs. 112 lb.  
RUS Listed

\*NEMA Standard