

TEES


BOLTED ALUMINUM

TUBING MAIN TO FLAT BAR TAP

ALUMINUM
ATTF

Aluminum alloy, tube to flat, tee for connecting aluminum tubing to aluminum or copper flat pad combinations. Flat pads have contact surface on one side. NEMA hole spacing is standard. Contact sealant is recommended.

Material: Castings—356-T6 aluminum alloy
Clamping hardware—aluminum alloy

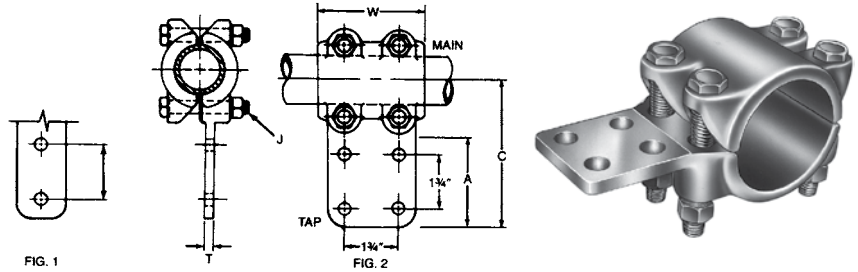

Product Data & Conductor Size

CATALOG NUMBER	FIG. NO.	CONDUCTOR SIZE		DIMENSIONS INCHES (MM)					APPROX. WT. EACH LBS. (KG)
		TUBING MAIN IPS/EHIPS	FLAT BAR TAP WIDTH—INCHES	C	A	W	T	J	
ATTF06201	1	3/4	2	4-7/8 (123.82)	3-1/4 (82.55)	2-1/2 (63.5)	3/8 (9.52)	1/2 (12.7)	1.3 (.6)
ATTF06301	2	3/4	3	5 (127.0)	3-1/4 (82.55)	2-1/2 (63.5)	3/8 (9.52)	1/2 (12.7)	1.6 (.72)
ATTF10201	1	1	2	5 (127.0)	3-1/4 (82.55)	2-3/4 (69.85)	3/8 (9.52)	1/2 (12.7)	1.4 (.6)
ATTF10301	2	1	3	5 (127.0)	3-1/4 (82.55)	2-3/4 (69.85)	3/8 (9.52)	1/2 (12.7)	1.6 (.72)
ATTF12201	1	1-1/4	2	5-1/8 (130.18)	3-1/4 (82.55)	3 (76.2)	3/8 (9.52)	1/2 (12.7)	1.7 (.8)
ATTF12301	2	1-1/4	3	5-1/8 (130.18)	3-1/4 (82.55)	3 (76.2)	3/8 (9.52)	1/2 (12.7)	1.7 (.8)
ATTF12401	2	1-1/4	4	5-1/8 (130.18)	3-1/8 (79.38)	3 (76.2)	3/8 (9.52)	1/2 (12.7)	1.9 (.86)
ATTF14201	1	1-1/2	2	5 (127.0)	3-1/8 (79.38)	3-1/4 (82.55)	3/8 (9.52)	1/2 (12.7)	2.2 (1.0)
ATTF14301	2	1-1/2	3	5-1/4 (133.35)	3-1/4 (82.55)	3-1/4 (82.55)	3/8 (9.52)	1/2 (12.7)	1.8 (.82)
ATTF14401	2	1-1/2	4	6-1/8 (155.58)	4-1/8 (104.78)	3-1/4 (82.55)	3/8 (9.52)	1/2 (12.7)	1.9 (.86)
ATTF20201	1	2	2	5-3/4 (146.05)	3-1/4 (82.55)	3-1/2 (88.9)	3/8 (9.52)	1/2 (12.7)	2.2 (1.0)
ATTF20301	2	2	3	5-1/2 (139.7)	3-1/4 (82.55)	3-1/2 (88.9)	3/8 (9.52)	1/2 (12.7)	2.3 (1.04)
ATTF20401	2	2	4	6-1/2 (165.1)	4-1/8 (104.78)	3-1/2 (88.9)	3/8 (9.52)	1/2 (12.7)	2.7 (1.22)
ATTF24301	2	2-1/2	3	5-7/8 (149.22)	3-1/4 (82.55)	3-3/4 (95.25)	1/2 (12.7)	5/8 (15.88)	2.8 (1.27)
ATTF24401	2	2-1/2	4	7 (177.8)	4-1/8 (104.78)	3-3/4 (95.25)	1/2 (12.7)	5/8 (15.88)	2.9 (1.32)
ATTF30301	2	3	3	6-1/8 (155.58)	3-1/4 (82.55)	4 (101.6)	1/2 (12.7)	5/8 (15.88)	4.2 (1.90)
ATTF30401	2	3	4	7-1/8 (180.98)	4-1/4 (107.95)	4 (101.6)	1/2 (12.7)	5/8 (15.88)	4.3 (1.95)
ATTF34401	2	3-1/2	4	7-3/4 (196.85)	4-1/4 (107.95)	4-1/4 (107.95)	5/8 (15.88)	5/8 (15.88)	4.8 (2.18)
ATTF40201	1	4	2	6-7/8 (174.62)	3-1/4 (82.55)	4-1/4 (107.95)	5/8 (15.88)	5/8 (15.88)	4.9 (2.2)
ATTF40301	2	4	3	6-7/8 (174.62)	3-1/4 (82.55)	4-1/4 (107.95)	5/8 (15.88)	5/8 (15.88)	4.9 (2.2)
ATTF40401	2	4	4	8 (203.2)	4-1/4 (107.95)	4-1/4 (107.95)	5/8 (15.88)	5/8 (15.88)	5.3 (2.4)
ATTF50401	2	5	4	8-1/2 (215.9)	4-1/4 (107.95)	5 (127.0)	5/8 (15.88)	5/8 (15.88)	6.8 (3.08)
ATTF60401	2	6	4	8-7/8 (225.42)	4-1/4 (107.95)	6 (152.4)	3/4 (19.05)	5/8 (15.88)	8.5 (3.86)

SC-11