


TEES BOLTED BRONZE CABLE MAIN TO CABLE TAP

| |
|--------|
| BRONZE |
| TCC |

Bronze alloy tee for connecting copper cable main to copper cable tap. Clamping bolts have hex-stops for one-wrench installation. All sizes furnished with reversible cable caps.

Material: Castings—bronze alloy
Hardware—silicon bronze or stainless steel

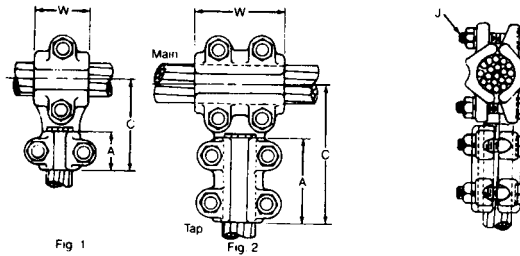

| CATALOG NUMBER | FIG NO. | COPPER CONDUCTOR RANGE | | | | DIMENSIONS INCHES (MM) | | | | APPROX. WT. EACH LBS. (KG) |
|----------------|---------|------------------------|---------------------------------|--------------------|-----------------------------|------------------------|------------------|------------------|---------------|----------------------------|
| | | MAIN | DIA. | TAP | DIA. | C | A | W | J | |
| | | CABLE | | CABLE | | | | | | |
| TCC4022022 | 1 | # 6 Sol.— 2/0 Str. | .162 - 419 (4.11-10.64) | # 6 Sol.— 2/0 Str. | .162-419 (4.11-10.64) | 2-5/8 (66.68) | 1-1/2 (38.1) | 1-1/2 (38.1) | 3/8 (9.52) | 1.1 (.50) |
| TCC4025022 | 1 | # 4 Sol. — 250 MCM | .204 - 575 (5.18 - 14.60) | # 6 Sol.— 2/0 Str. | .162-419 (4.11-10.64) | 2-5/8 (66.68) | 1-1/2 (38.1) | 1-1/2 (38.1) | 3/8 (9.52) | 1.4 (.64) |
| TCC4 025025 | 1 | | | # 4 Sol. — 250 MCM | .204-575 (5.18-14.60) | 2-3/4 (69.85) | 1-3/4 (44.45) | 1-3/4 (44.45) | 3/8 (9.52) | 1.4 (.64) |
| TCC4025050 | 1 | | | 1/0 Sol. — 500 MCM | .325-.813 (8.26-20.65) | 3-3/8 (85.72) | 2-1/4 (57.15) | 1-3/4 (44.45) | 3/8 (9.52) | 1.4 (.64) |
| TCC4050022 | 1 | 1/0 Sol. — 500 MCM | .325-.813 (8.26 - 20.65) | # 6 Sol.— 2/0 Str. | .162-419 (4.11-10.64) | 2-5/8 (66.68) | 1-1/2 (38.1) | 2-1/4 (57.15) | 3/8 (9.52) | 1.4 (.64) |
| TCC4050025 | 1 | | | # 4 Sol. — 250 MCM | .204-575 (5.18-14.60) | 2-7/8 (73.02) | 1-1/2 (38.1) | 2-1/4 (57.15) | 3/8 (9.52) | 1.6 (.72) |
| TCC8025025 | 2 | # 4 Sol. — 250 MCM | .204 - 575 (5.18 - 14.60) | # 4 Sol. — 250 MCM | .204-575 (5.18-14.60) | 4-1/8 (104.78) | 2-3/4 (69.85) | 2-3/4 (69.85) | 1/2 (12.7) | 2.7 (1.22) |
| TCC8025025-3 | 2 | | | # 4 Sol. — 250 MCM | .204-575 (5.18-14.60) | 3-5/8 (92.08) | 2-1/2 (63.5) | 2-1/2 (63.5) | 3/8 (9.52) | 2.3 (1.04) |
| TCC8050025 | 2 | 1/0 Sol. — 500 MCM | .325 - .812 (8.26 - 20.65) | # 4 Sol. — 250 MCM | .204-575 (5.18-14.60) | 3-7/8 (98.42) | 2-1/2 (63.5) | 2-3/4 (69.85) | 1/2 (12.7) | 2.9 (1.32) |
| TCC8050025-3 | 2 | | | # 4 Sol. — 250 MCM | .204-575 (5.18-14.60) | 4 (101.6) | 2-3/4 (69.85) | 2-3/4 (69.85) | 3/8 (9.52) | 2.3 (1.04) |
| TCC8050050 | 2 | | | 1/0 Sol. — 500 MCM | .325-813 (8.26-20.65) | 4-1/8 (104.78) | 2-3/4 (69.85) | 2-3/4 (69.85) | 1/2 (12.7) | 3.4 (1.54) |
| TCC8050050-3 | 2 | | | 1/0 Sol. — 500 MCM | .325-813 (8.26-20.65) | 4 (101.6) | 2-3/4 (69.85) | 2-3/4 (69.85) | 3/8 (9.52) | 3.0 (1.36) |
| TCC8080080 | 2 | 2/0 Sol. — 800 MCM | .365 - 1.031 (9.27 - 26.19) | 2/0 Sol. — 800 MCM | .365-1.031 (9.27-26.19) | 5-5/8 (142.88) | 4 (101.6) | 4 (101.6) | 1/2 (12.7) | 4.6 (2.09) |
| TCC8100025 | 2 | 4/0 Str.— 1000 MCM | .460 - 1.152 (11.68 - 29.26) | #4 Sol.— 250 MCM | .204-575 (5.18-14.60) | 4-1/8 (104.78) | 2-1/2 (63.5) | 3-1/2 (88.9) | 1/2 (12.7) | 3.9 (1.77) |
| TCC8100025-3 | 2 | | | #4 Sol.— 250 MCM | .204-575 (5.18-14.60) | 4-1/8 (104.78) | 2-3/4 (69.85) | 3-1/2 (88.9) | 3/8 (9.52) | 3.3 (1.50) |
| TCC8100050 | 2 | | | 1/0 Sol. — 500 MCM | .325-813 (8.26-20.65) | 4-3/8 (111.12) | 2-3/4 (69.85) | 3-1/2 (88.9) | 1/2 (12.7) | 4.0 (1.81) |
| TCC8100100 | 2 | | | 4/0 Str.— 1000 MCM | .460-1.152 (11.68-29.26) | 5-1/8 (130.18) | 3-1/2 (88.9) | 3-1/2 (88.9) | 1/2 (12.7) | 5.6 (2.54) |

Continued on next page.

SC-13