


DIMENSIONS



DESCRIPTION

The Sure-Lites CHX Series Exits are ideal exits for general purpose applications. An extensive range of field installed accessories, choice of faces and the variety of possible mounting configurations permit the tailoring of this exit to almost any application. Durable steel construction, attractive styling and high efficiency illumination make this series compatible in commercial, institutional, and multi-housing applications.

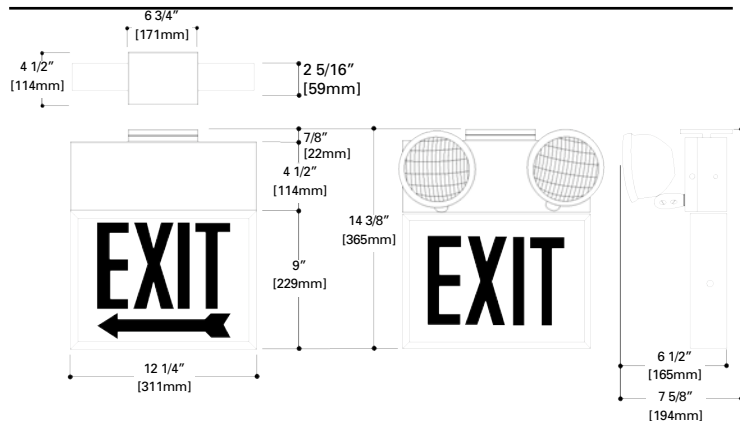

STEEL EXITS - SELF-POWERED

Type	Mounting	No Arrow	Arrow Right	Arrow Left	Double Arrow
Self Powered Incandescent					
Single Face	Wall	CHX303	CHX306	CHX309	CHX312
Single Face w/Canopy	Wall/Ceiling/End	CHX303C	CHX306C	CHX309C	CHX312C
Double Face w/Canopy	Ceiling/End	CHX318C	CHX321C	CHX321C	CHX324C
Self Powered Incandescent - High Output					
Single Face	Wall	CHXH303	CHXH306	CHXH309	CHXH312
Single Face w/Canopy	Wall/Ceiling/End	CHXH303C	CHXH306C	CHXH309C	CHXH312C
Double Face w/Canopy	Ceiling/End	CHXH318C	CHXH321C	CHXH321C	CHXH324C
Self Powered Incandescent With Double Heads					
Single Face	Wall	CHX303DH	CHX306DH	CHX309DH	CHX312DH
Single Face w/Canopy	Wall/Ceiling/End	CHX303DHC	CHX306DHC	CHX309DHC	CHX312DHC
Double Face w/Canopy	Ceiling/End	CHX318DHC	CHX321DHC	CHX321DHC	CHX324DHC
Self Powered Fluorescent					
Single Face	Wall	CHX503	CHX506	CHX509	CHX512
Single Face w/Canopy	Wall/Ceiling/End	CHX503C	CHX506C	CHX509C	CHX512C
Double Face w/Canopy	Ceiling/End	CHX518C	CHX521C	CHX521C	CHX524C
Self Powered Fluorescent - High Output					
Single Face	Wall	CHXH503	CHXH506	CHXH509	CHXH512
Single Face w/Canopy	Wall/Ceiling/End	CHXH503C	CHXH506C	CHXH509C	CHXH512C
Double Face w/Canopy	Ceiling/End	CHXH518C	CHXH521C	CHXH521C	CHXH524C
Self Powered Fluorescent With Double Heads					
Single Face	Wall	CHX503DH	CHX506DH	CHX509DH	CHX512DH
Single Face w/Canopy	Wall/Ceiling/End	CHX503DHC	CHX506DHC	CHX509DHC	CHX512DHC
Double Face w/Canopy	Ceiling/End	CHX518DHC	CHX521DHC	CHX521DHC	CHX524DHC
Self Powered LED²					
Single Face	Wall	CHX703	CHX706	CHX709	CHX712
Single Face w/Canopy	Wall/Ceiling/End	CHX703C	CHX706C	CHX709C	CHX712C
Double Face w/Canopy	Ceiling/End	CHX718C	CHX721C	CHX721C	CHX724C

WATTAGE RATING

CHX Series=72W for 2 hrs.;CHXH Series=72W for 4 hrs., 32W for 1 1/2 hrs.(72W plus 24W Remote);CHX Double Head Series=32W for 1 1/2 hrs. SAMPLE NUMBERS: CHX Series CHX303, High Output Series CHXH303, CHX Double Head Series CHX303DH

ORDERING INFORMATION

SAMPLE NUMBER: CHX303

Model Number	Accessories (order separately)
See chart above	<p>Pendant Kit PK18WH=White, 18" long</p> <p>Canopy Kit CHX1C=White</p> <p>Wire Guard Choose size of wire guard desired from Accessories sheet</p> <p>"STAIR" Lens 004260SP=No Arrow 004261SP=Arrow Left 004262SP=Arrow Right 004263SP=Double Arrow</p> <p>"EXIT" Lens 004213SP=No Arrow 004214SP=Arrow Left 004215SP=Arrow Right 004216SP=Double Arrow</p> <p>Remote Head -6V, 12W Single Head¹ 6T12MHWH—Two Maximum</p> <p>Remote Head -6V, 12W Each Double Head¹ 6T12DMHWH—One Maximum</p>

Energy Data

Model No.	Input Power	
	120V	277V
CHX - Incandescent	52W	52W

Model No.	Input Power	
	120V	277V
CHX - Fluorescent	23W	23W

Model No.	Input Power	
	120V	277V
CHX - LED ²	11W	12W

Standby Mode (Fully Charged) Sealed Lead Calcium Battery

Input Power consumption is reduced by approximately 7 Watts in the standby operating mode for incandescent and fluorescent exits.

CHX/CHXH SERIES

Steel
Self-Powered

CHICAGO CODE
EMERGENCY LIGHTING

- > Dual-voltage input 120/277VAC, 60Hz
- > 20 gauge steel housing, white finish
- > LED, Incandescent or Fluorescent lamping
- > Universal pattern knock-outs on rear for direct mounting to junction box
- > Full length, 3/4" stroke arrow on directional exits
- > Red silkscreened lettering on white phosphorescent, heat tempered, Impact-resistant glass lens
- > Lens installs from side of fixture
- > Louvered downlight
- > Line-latching, solid-state voltage limited charger, solid-state switching, low-voltage disconnect, brownout circuit, overload/short-circuit protection, test switch/power indicator light
- > UL 924 Listed, Life Safety NFPA 101, NEC/OSHA
- > City of Chicago Approved

¹Incandescent and Fluorescent Fixtures Only. ²Chicago Approved LED Fixtures Uses Long Life NI-CD Batteries, Standard.