

## Nylon Cable Protector



- Fits in the end of conduit to shield the cable from sharp edges as it is being fed through.
- Rugged nylon resists abrasion.

CAT. NO.	UPC NO.	DESCRIPTION
488-2	32928	Nylon Cable Protector for 2" and 2-1/2" conduit
488-3	32929	Nylon Cable Protector for 3" - 6" conduit

SPECIFICATIONS	
<b>Weight</b>	488-2 - 0.08 lbs. (36 g) 488-3 - 0.2 lbs. (90 g)

## Cable Guide



- Position where cables are being pulled over sharp edges.

CAT. NO.	UPC NO.	DESCRIPTION
489	32930	Nylon Cable Guide

SPECIFICATIONS	
<b>Weight</b>	489 - .5 lbs. (227 g)
<b>Size</b>	13" L x 3-1/4" W x 12" radius

## Light Base Sheave




- Mounts directly to existing square light pole bolt patterns.
- Slotted mounting holes fit a wide range of bolt circle sizes.
- Tall enough to position sheave above most conduits.
- Rugged welded steel base structure.
- Allows user to install wires into outdoor light bases by pulling horizontally.
- Also can be used to feed wires into vertical light base conduit.

CAT. NO.	UPC NO.	DESCRIPTION
459	89800	Light Base Sheave

SPECIFICATIONS	
<b>Overall Height</b>	14-1/2" (368 mm)
<b>Weight</b>	18 lbs. (8.2 kg)
<b>Bolt Circle Capability</b>	7.8" (198 mm) to 14.8" (376 mm) diameter
<b>Maximum Mounting Bolt Dia.</b>	1" (25 mm) diameter at 7.8" (198 mm) bolt circle 1-1/2" (38 mm) at 14.8" (376 mm) bolt circle
<b>Pulling Capacity</b>	500 lbs. (227 kg)

## CR25

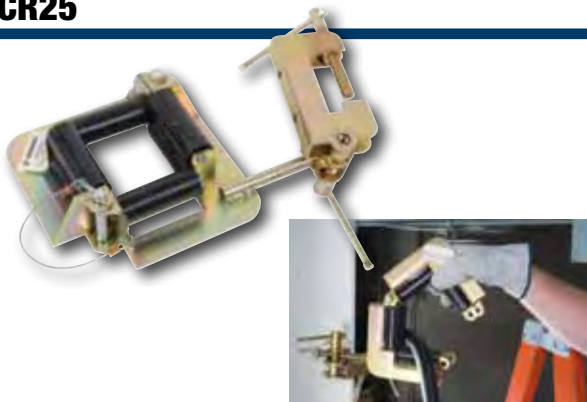

- Six nylon rollers provide smooth movement of cable and prevent cable damage.
- Pull pin makes opening and closing to insert and remove cables a simple one step operation.
- Adjustment clamp allows the CR25 to be swiveled and/or rotated into any position.
- Heavy duty 12 gauge cold rolled steel construction for durability and zinc dichromate finish prevents corrosion.
- Up to 20 network cables can be pulled at one time.
- Easily attaches to wooden framing members using a lag bolt and the hole in the mounting bracket of the CR25.
- May also be used with coax, NM, small size THHN, and similar cables.

SPECIFICATIONS	
<b>Roller Opening Size</b>	3" (76 mm) square
<b>Weight</b>	2 lb. (1 kg)

CAT. NO.	UPC NO.	DESCRIPTION
CR25	12211	Cable Roller Guide

NOTE: Rope is a very critical link in the cable pulling system. See page 166 for proper pulling rope selection.