




**PolyTuff® I Conduit, Gray or Black**

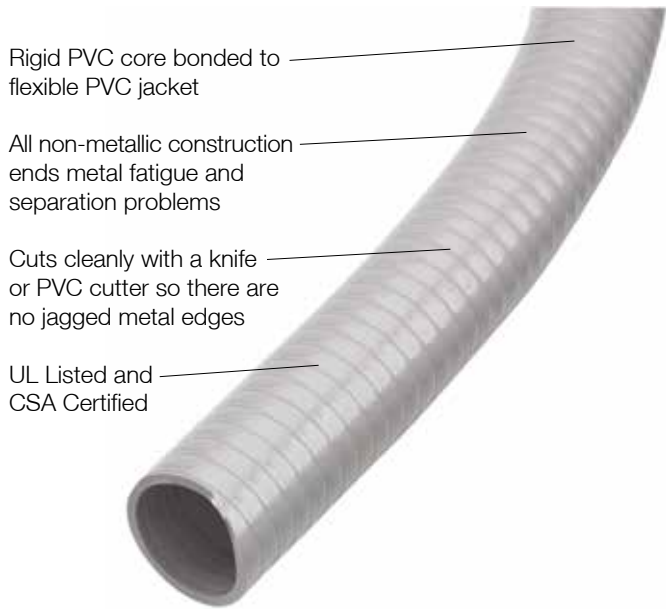


Rigid PVC core bonded to flexible PVC jacket

All non-metallic construction ends metal fatigue and separation problems

Cuts cleanly with a knife or PVC cutter so there are no jagged metal edges

UL Listed and CSA Certified

**PolyTuff® II Tubing, Black**

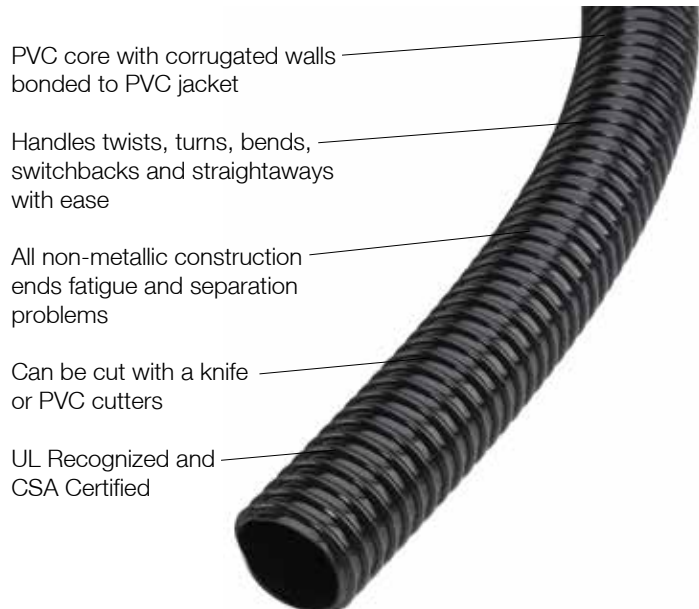

PVC core with corrugated walls bonded to PVC jacket

Handles twists, turns, bends, switchbacks and straightaways with ease

All non-metallic construction ends fatigue and separation problems

Can be cut with a knife or PVC cutters

UL Recognized and CSA Certified



**G1100**



**G1100M1**

**IP66**  
SUITABILITY



**PolyTuff® I Conduit**

| Trade Size (metric designator) | Feet (m)   | Gray Catalog Number | Black Catalog Number |
|--------------------------------|------------|---------------------|----------------------|
| 3/8 (12)                       | 100 (30.5) | <b>G1038</b>        | <b>G1038M1</b>       |
| 1/2 (16)                       | 100 (30.5) | <b>G1050</b>        | <b>G1050M1</b>       |
| 3/4 (21)                       | 100 (30.5) | <b>G1075</b>        | <b>G1075M1</b>       |
| 1 (27)                         | 100 (30.5) | <b>G1100</b>        | <b>G1100M1</b>       |
| 1 1/4 (35)                     | 100 (30.5) | <b>G1125</b>        | <b>G1125M1</b>       |
| 1 1/2 (41)                     | 50 (15.2)  | <b>G1150</b>        | <b>G1150M1</b>       |
| 2 (53)                         | 50 (15.2)  | <b>G1200</b>        | <b>G1200M1</b>       |

Note: See pages V-66 and V-67, V-100 and V-101 for approved fittings.  
See pages V-102 and V-103 for technical information and dimensional drawings.



**B2100**

**IP66**  
SUITABILITY



**PolyTuff® II Tubing**

| Trade Size (metric designator) | Feet (m)   | Catalog Number |
|--------------------------------|------------|----------------|
| 1/4 (10)                       | 100 (30.5) | <b>B2025</b>   |
| 3/8 (12)                       | 100 (30.5) | <b>B2038</b>   |
| 1/2 (16)                       | 100 (30.5) | <b>B2050</b>   |
| 3/4 (21)                       | 100 (30.5) | <b>B2075</b>   |
| 1 (27)                         | 100 (30.5) | <b>B2100</b>   |
| 1 1/4 (35)                     | 100 (30.5) | <b>B2125</b>   |
| 1 1/2 (41)                     | 50 (15.2)  | <b>B2150</b>   |
| 2 (53)                         | 50 (15.2)  | <b>B2200</b>   |

Note: See page V-100 for approved fittings.  
See pages V-102 and V-103 for technical information and dimensional drawings.