



# Meter Centers



## EUSERC Compliant Side-by-Side Meter-Load Center Combination, 1-Phase, 3-Wire 120/240V AC

- UL Listed
- 400A Max, 320A Continuous
- Meter socket options include 320A (400A max), non-bypass and test block bypass
- Load center options include 8 space panel and 24-30 space panels
- 22,000 AIC Rated
- Factory installed flush mount option
- Surface mount devices accept field added flush rails
- Suitable for use only as service entrance equipment
- Contact local utility to confirm meter socket acceptance prior to installation
- See end of section for knock out diagrams and wiring schematics

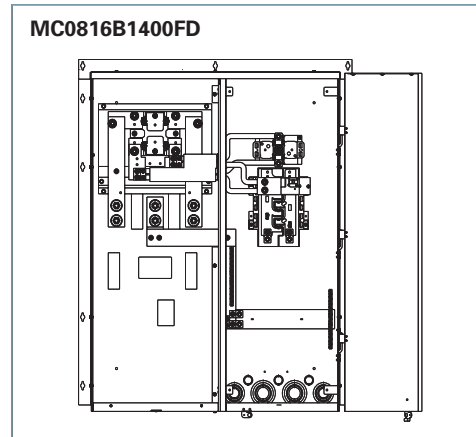

Catalog Number	Amp Rating (Cont.)	Utility Incoming	Bypass Type	No. of Spaces	No. of Circuits	Dimensions (inches)			Main Breaker	Short Circuit Rating	Mounting	Hub Provision	5th Jaw	Cover Type
						H	W	D						

### EUSERC Compliant Meter-Load Center Combination, 400amp max. with 200amp Subfeed Provision<sup>②</sup>

MC0816B1400SC <sup>①</sup>	320	OH/UG	None	8	16	39.7	33.2	6.4	Factory installed QN2200RH & Field Installed secondary QP(H) or QNR(H)	22,000	Surface	HD (top) HC (bot)	—	Ring
MC0816B1400FD <sup>①</sup>		UG					30.2	7.4			Flush	HC (bot)	—	
MC3042B1400SC		OH/UG	None	30	42	39.7	33.2	6.4	22,000	Surface	HD (top) HC (bot)	—		
MC3042B1400SD		UG					30.2	6.4				—		
MC3042B1400FD		UG					30.2	7.4	Flush	HC (bot)	—			

### EUSERC Compliant Meter-Load Center Combination, 400amp max. with 400amp Main Breaker<sup>②</sup>

MC2442B1400SD	320	UG	None	24	42	39.7	30.2	6.6	Factory JXD6	22,000	Surface	HD (top) HC (bot)	—	Ring
---------------	-----	----	------	----	----	------	------	-----	--------------	--------	---------	----------------------	---	------

### EUSERC Compliant Meter-Load Center Combination with Test Block Bypass, 400amp max. with 200amp Subfeed Provision<sup>②</sup>

MC0816B1400SCS <sup>①</sup>	320	OH/UG	Test Block	8	16	39.7	33.2	6.4	Factory QN2200RH & Field secondary QP(H) or QNR(H)	22,000	Surface	HD (top) HC (bot)	—	Ring
MC0816B1400FDS <sup>①</sup>		UG					30.2	7.4			Flush	HC (bot)	—	
MC2442B1400SDS		UG	Manual	24	42	40.0	30.0	6.5	Factory JXD	22,000	Flush	HD	—	
MC3042B1400SCS		OH/UG	Test Block	30	42	39.7	33.2	6.4	22,000	Surface	HD (top) HC (bot)	—		
MC3042B1400SDS		UG					30.2	6.4				—		
MC3042B1400FDS	UG	30.2					7.4	Flush	HC (bot)	—				

① Feed thru lugs included.  
② Line side lugs not included.