



## GROUNDING

GREAVES EXCLUSIVE

# HIGH-WING™ SYSTEM

Continuous Run Capability

### For Direct Burial Grounding and Bonding

Corrosion-resistant cast bronze alloy body, silicon bronze hardware  
 Applications include galvanized pipe, rod, tube, fencing, rebar (#6, 3/4" and up)  
 Suitable for use in harsh environments such as agricultural buildings,  
 swimming pool/spa, food processing, marine, grounding grid and others  
 Orient head in any direction - lock in position with serrated teeth  
 Replaces exothermic welding  
 Clamps are approved for direct burial in earth and concrete

### Direct Burial

Copper wire only


Wire up to #4/0 AWG  
 Pipe sizes 1/2" to 6"



### G-DB SERIES

NAED NUMBER	CATALOG NUMBER	WATER PIPE SIZE	REBAR SIZE		GROUND WIRE	CTN QTY
			#	INCH		
30750	G 140-DB	1/2" - 1"	6 - 9	3/4 - 1 1/8		25
30760	G 240-DB	1 1/4" - 2"	11	1 3/8	#4/0STR-10SOL	10
30770	G 440-DB	2 1/2" - 4"	-	-		2
30780	G 640-DB	4 1/2" - 6"	-	-		2

Not for use on epoxy coated rebar

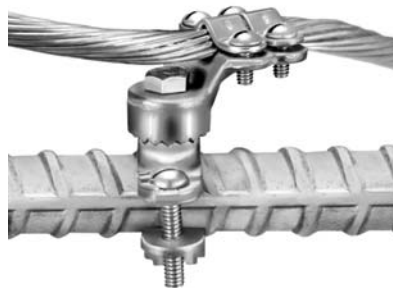

### REBAR GROUND CLAMPS

Jones Bond™ Lay-in Rebar Clamp for Continuous Loop Grounding / Bonding  
 Pool / Spa bonding and grounding  
 "Ufer" Grounding (concrete encased electrodes)  
 Replaces Exothermic Welding

Installs quickly, grips rebar firmly between ridges with special teeth  
 Bronze body, stainless steel screw for direct burial  
 CSA Certified for direct burial in earth and concrete on rebar

### Direct Burial

Copper wire only



### J-DB SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	REBAR SIZE		WEIGHT LBS/CTN	CTN QTY
			#	INCH		
27101	J 29-DB	8 - 6 SOL	3	3/8	7.5	50
27110	J 30-DB	8 SOL - 4 STR	4	1/2	8.5	50
27120	* J 31-DB	6 SOL - 2/0 STR	5	5/8	5.0	25
27130	** J 32-DB	6 SOL - 4/0 STR	4,5,6	1/2,5/8,3/4	4.3	12

Not for use on epoxy coated rebar.

\*UL listed for #4 STR - #2 STR

\*\* UL pending



Patent Pending