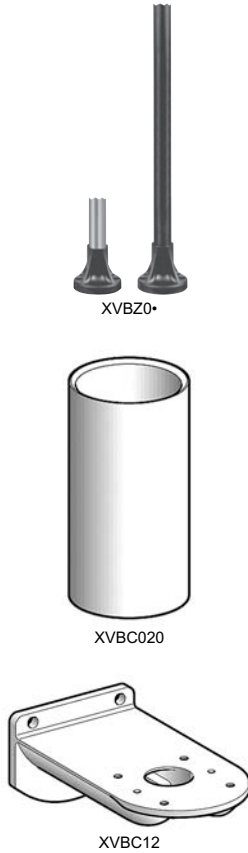


**XVB 70 mm Accessories**

**Table 19.365: XVB Accessories**


| Description  | Characteristics   |        | Catalog Number                             |             |
|--|---|--------|--|-------------|
|  | in.   | mm     |  |             |
| Black tube with integral black plastic mounting base (includes gasket) | 4.72  | 120    | XVBZ02                                     | XVBZ02A [6] |
|  | 15.75   | 400    | XVBZ03                                     | XVBZ03A [6] |
|  | 31.50   | 800    | XVBZ04                                     | XVBZ04A [6] |
| Support tube concealment cover   | 3.94  | 100    |  | XVBC020     |
|  | 15.75   | 400    |  | XVBC030     |
|  | 31.50   | 800    |  | XVBC040     |
| Wall mount bracket (metal)   | For direct mounting on base unit or with tulip XVBC11 + tube XVBC0*                       |        | XVBC12                                     |             |
| Incandescent bulbs bayonet type BA 15d, 10 Watts                       | 12 Vac/Vdc  |        | DL1BLJ                                     |             |
|  | 24 Vac/Vdc  |        | DL1BLB                                     |             |
|  | 48 Vac/Vdc  |        | DL1BLE                                     |             |
|  | 120 Vac/Vdc   |        | DL1BLG                                     |             |
|  | 230 Vac/Vdc   |        | DL1BLM                                     |             |
| Incandescent bulbs bayonet type BA 15d, 7 Watts                        | 12 Vac/Vdc  |        | DL1BEJ                                     |             |
|  | 24 Vac/Vdc  |        | DL1BEB                                     |             |
|  | 48 Vac/Vdc  |        | DL1BEE                                     |             |
|  | 120 Vac/Vdc   |        | DL1BEG                                     |             |
|  | 230 Vac/Vdc   |        | DL1BEM                                     |             |
| Steady-On LED bulbs bayonet type BA 15d (sold as single) [7]           | 24 Vac/Vdc  | White  | DL1BDB1                                    |             |
|  |   | Green  | DL1BDB3                                    |             |
|  |   | Red    | DL1BDB4                                    |             |
|  |   | Blue   | DL1BDB6                                    |             |
|  |   | Yellow | DL1BDB8                                    |             |
|  | 120 Vac   | Amber  | DL1BDB5                                    |             |
|  |   | White  | DL1BDG1                                    |             |
|  |   | Green  | DL1BDG3                                    |             |
|  |   | Red    | DL1BDG4                                    |             |
|  |   | Blue   | DL1BDG6                                    |             |
| Flashing LED bulbs   | 24 Vac/Vdc  | White  | DL1BKB1                                    |             |
|  |   | Green  | DL1BKB3                                    |             |
|  |   | Red    | DL1BKB4                                    |             |
|  |   | Amber  | DL1BKB5                                    |             |
|  |   | Blue   | DL1BKB6                                    |             |
|  | 120 Vac   | Yellow | DL1BKB8                                    |             |
|  |   | White  | DL1BKG1                                    |             |
|  |   | Green  | DL1BKG3                                    |             |
|  |   | Red    | DL1BKG4                                    |             |
|  |   | Amber  | DL1BKG5                                    |             |
| Adapter for side entry through base unit                               | With CM12 (p. 13.5) cable gland, for cable size of 0.4 to 0.55 in. (10 to 14 mm) diameter |        | XVBC14                                     |             |
|  | Conduit adapter   |        | 1/2 in. NPT (for customer supplied tubing) |             |
|  |   |        | XVBC00                                     |             |



**Table 19.366: XVB Markers and Legend Holders**

| Description             | Characteristics                         | Catalog Number |
|-------------------------|---|----------------|
| Set of colored markers  | 6 colors                                | XVBC22         |
| Set of 5 legend holders | Identification of stacked units on base | XVBC23         |

**Wiring Diagrams, Base Units**

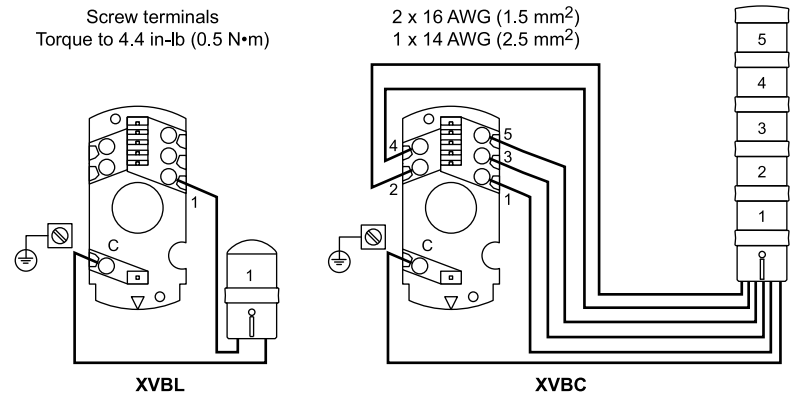

[6] Aluminum tube.  
[7] For 240 Vac, replace the B or G in the catalog number with M—for example, DL1BDM1. For flashing LEDs, refer to catalog 9001CT0001.