

Tools



Screwdriver

Description	Type	Order P/N	Packaging Weight kg
Screwdriver DIA. 3.5 mm .137"		030 411 423	

EXBN2 extraction tool

Extraction tool for plug type disconnect terminal blocks.

Extraction tool	EXBN2	1SNA 171 018 R2000	
-----------------	-------	--------------------	--

Ferrule crimping tools

All purpose economy crimping tool.

Ferrule wire range	P/N
22 to 10 AWG	0305 626.05
10 to 6 AWG	0305 627.06

Heavy duty industrial grade crimping tool.


Ferrule wire range	P/N
8 to 1 AWG	0304 441.03

Wire stripping tool

Wire strip range	P/N
20 to 10 AWG	XUS0 003.71


Fast and easy-to-operate wire stripper that needs no adjustment and will not damage solid or stranded wire. Ideal for use in any control or low voltage wire stripping applications for wire sizes from 20 AWG to 10 AWG (0.5 mm² to 6 mm²). Stripping blades are replaceable with expected operating life in excess of 100,000 operations. Includes wire cutter and adjustable wire stop for consistent length of stripping.

Screwdrivers

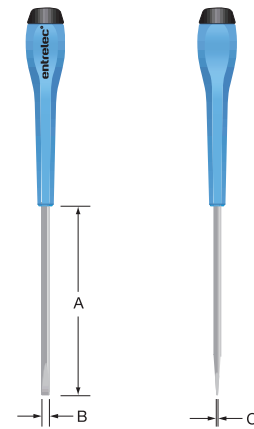

A (mm)	B (mm)	C (mm)
Shaft Length	Tip Width	Tip Cross Section
65	2.0	0.4
100	3.5	0.6
125	5.5	1.0
150	6.5	1.2

Tip Width, mm	P/N
Package of 4	0101 695.27



Screwdrivers are configured to facilitate connect and disconnect of wire in screw clamp terminal blocks. Nonbreakable tip for long life. Tapered shank and rotating top provides operator comfort during repetitive use. Designed for precise screw slot fit for all screw clamp terminal block connections. Screwdrivers may be ordered separately or as a package of four (4).