

# Standby Power Systems

## ST Type Transfer Switches





### “SL” Type transfer switches

Transfer switches provide the mechanism for transferring power between utility and generator service. Engineered with Digital Load Management (DLM) technology, 100-400A single phase SL Type transfer switches have the ability to cycle on and off two air conditioners without adding additional components, allowing for a smaller generator to cover more circuits than when paired with a standard transfer switch.

### Features and ratings

- 100–800A
- Outdoor NEMA 3R aluminum enclosure
- Open transition
- Compatible with Nexus controllers
- Cover more circuits with a smaller generator
- Service rated and non-service rated
- Add additional individual DLM modules (5937) and manage up to four more large loads on single phase SL type transfer switches. See page 18-19
- Cover every circuit when paired with a higher kW generator

Catalog Number	Amp	Phase	Withstand Rating (Amps)	Weight (lb.)	Dimensions (in.)
SL100R	100	120/240V, 1Ø	10,000	20	20 x 14.6 x 7.09
SL100RD <sup>Ⓞ</sup>				22.5	20 x 14.6 x 7.09
SL100C		120/208V, 3Ø	10,000	20	24.1 x 20.2 x 7.1
SL100J		120/240V, 3Ø	14,000	53	24.1 x 20.2 x 7.1
SL100I		277/480V, 3Ø	14,000	105	36.1 x 24 x 10
SL150RD <sup>Ⓞ</sup>	150	120/240V, 1Ø	22,000	39	30 x 13.5 x 7.09
SL200R	200	120/240V, 1Ø	22,000	20	20 x 14.6 x 7.09
SL200RD <sup>Ⓞ</sup>				39	30 x 13.5 x 7.09
SL200C		120/208V, 3Ø	10,000	20	24.1 x 20.2 x 7.1
SL200J		120/240V, 3Ø	25,000	53	24.1 x 20.2 x 7.1
SL200I		277/480V, 3Ø	25,000	105	48.1 x 30.1 x 13.1
SL200RDPM <sup>Ⓞ</sup>		120/240V, 1Ø	10,000	75	42 x 20 x 7.25
SL400R	400	120/240V, 1Ø	18,000	133	36.1 x 24 x 10
SL400RD <sup>Ⓞ</sup>			22,000	140	48 x 21.82 x 10.06
SL400C		120/208V, 3Ø	18,000	133	36.1 x 24 x 10
SL400J		120/240V, 3Ø	18,000	133	36.1 x 24 x 10
SL400I		277/480V, 3Ø	18,000	133	36.1 x 24 x 10
SL600R	600	120/240V, 1Ø	42,000	439	66 x 36 x 21
SL600C		120/208V, 3Ø	42,000	439	66 x 36 x 21
SL600J		120/240V, 3Ø	42,000	439	66 x 36 x 21
SL600I		277/480V, 3Ø	42,000	439	66 x 36 x 21
SL800R	800	120/240V, 1Ø	65,000	469	66 x 36 x 21
SL800C		120/208V, 3Ø	65,000	469	66 x 36 x 21
SL800J		120/240V, 3Ø	65,000	469	66 x 36 x 21
SL800I		277/480V, 3Ø	65,000	469	66 x 36 x 21

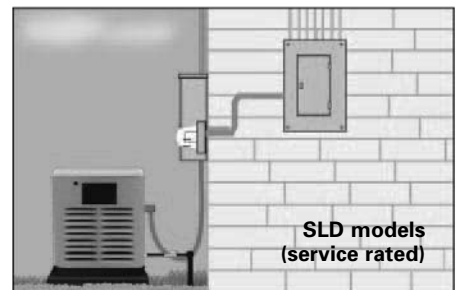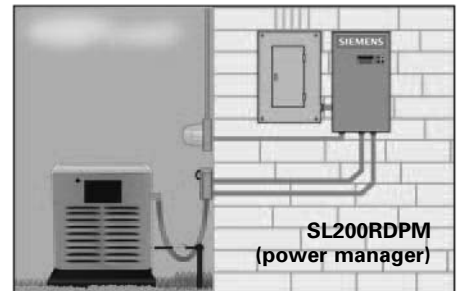

<sup>Ⓞ</sup> Disconnect included