


# SB

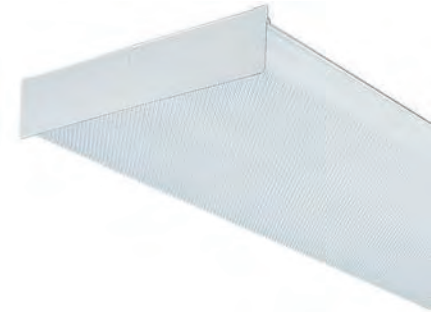

**Intended Use**

For surface ceiling-mount applications that require the clean appearance of a flat-bottom diffuser. Provides high light levels for storage rooms, offices, extra space, or retail applications.

**Features**

- Flat-bottom acrylic prismatic diffuser
- Matches CS series in appearance
- Full-depth, white enamel end plates

- Linear side prisms control brightness; pyramidal bottom prisms minimize lamp image
- Diffuser hinges open from either side for easy cleaning and service
- Surface or stem mounting (4' models only), unit or row installation

**Listings**

UL Listed. cUL Listed or CSA Certified to Canadian Standards - optional. NOM Certified - optional.

**ORDERING INFORMATION**

Specifications subject to change.

**Example: SB 2 32 MVOLT GEB10IS**

Series <sup>1,2</sup>	Number of lamps	Lamp type	Voltage	Ballast configuration
SB Standard width	2	17 17W T8 (24")	MVOLT	(blank) 1- and/or 2- lamp ballasts per Lithonia Lighting standards
2SB Two lamps in wide housing	4 <sup>2</sup>	32 32W T8 (48")	347 <sup>3</sup>	1/4 One 4-lamp ballast
	Not included.	14T5 14W T5 (22 1/2")		
		28T5 28W T5 (46")		
		54T5HO 54W T5HO (46 1/2")		



Ballast	Options
GEB10IS Electronic ballast, ≤10% THD, instant start	EL Emergency battery pack <sup>5,6</sup>
GEB10PS Electronic ballast, ≤10% THD, programm start	CSA Meets Canadian standards
BINP T8 high-efficiency ballast factor (.88), instant start <sup>4</sup>	NOM Meets Mexican standards
BPNP T8 high-efficiency ballast factor (.88), programmed rapid start <sup>4</sup>	

**ADDITIONAL INFORMATION**

For additional product information, visit [www.lithonia.com](http://www.lithonia.com).

SERIES	CONFIGURATIONS					
	LAMPS PER CROSS SECTION	LAMPS PER FIXTURE	LAMP TYPE	LENGTH IN. (CM)	WIDTH IN. (CM)	HEIGHT IN. (CM)
SB	2	2	17	24 (61.0)	8-5/8 (21.9)	2-5/8 (6.7)
SB	2	2	32	48 (121.9)	8-5/8 (21.9)	2-5/8 (6.7)
SB	4	4	32	48 (121.9)	14-3/16 (36.0)	2-3/4 (7.0)
2SB	2	2	32	48 (121.9)	14-3/16 (36.0)	2-3/4 (7.0)

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.



**Notes**

- 1 For tandem double-length unit, use prefix T. Example: TSB.
- 2 Tandem not available with 2SB or S B four-lamp configurations.
- 3 Available only with CSA option.
- 4 Consult [www.lithonia.com](http://www.lithonia.com) for additional high-efficiency ballast options.
- 5 Consult [www.lithonia.com](http://www.lithonia.com) for available options.
- 6 Not available in 2' configurations.

Certain airborne contaminants can diminish integrity of acrylic and polycarbonate. Refer to the Acrylic & Polycarbonate Environmental Compatibility tables on pages 1116-1117 for suitable uses.