

# Comfort options that work for you.

Whenever there's a dirty, dusty job to be done, a comfortable respirator can help to make your workers want to wear it and promote compliance as required at all times during exposure to hazardous or unhealthy conditions.

There are options to protect against airborne particles and mists that can affect your workers' health. 3M offers a wide selection of NIOSH-approved filtering facepiece respirators for numerous work-related tasks. Whether it's sweeping, sanding, grinding, sawing, bagging or welding, 3M provides a variety of innovative technologies and features – all designed to provide comfort, convenience and value.

- Lightweight and comfortable
- Adjustable noseclips to help provide a custom seal
- Variety of strap types and attachments
- Some available with carbon filter material for nuisance level gas/vapor relief<sup>1</sup>
- Compatible with certain eye protection

## Get more face time.

A respirator can't give workers all the protection it was designed to provide, unless it is selected and worn correctly during all periods of exposure. That's why 3M uses a variety of innovative technologies and features designed to enhance user comfort and help increase wear time.

Disposable respirators require a good seal between the respirator and face to deliver the expected protection. To obtain a good seal, always follow all directions provided with each respirator model.

## Important

All 3M Filtering Facepieces are NIOSH- approved respirators. Before using, you must determine the following:

1. The types of contaminants for which the respirator is being selected, and exposure time.
2. The concentration level of the contaminant(s). Do not use for particle concentrations that exceed 10 times the OSHA PEL or applicable occupational exposure limit, whichever is lower.
3. Whether the respirator can be properly fitted to the wearer's face. Do not use with beards, or other conditions that prevent a good seal between the face and the sealing surface of the respirator.
4. Before required use of filtering facepiece respirators, a written respiratory protection program must be implemented, meeting all the requirements of OSHA 29 CFR 1910.134 including medical evaluation, training, and fit testing.

<sup>1</sup> 3M recommended for relief against nuisance level acid gas or organic vapors. Nuisance levels are less than OSHA PEL or applicable government occupational exposure limits, whichever is lower.


## Particulate filter types

NIOSH-approved filters are rated as N95, R95, P95, N99, R99, P99, N100, R100 or P100. The number 95, 99, or 100 (99.97%) indicates the percent NIOSH filtration efficiency.

- |                 |   |
|-----------------|---|
| <b>N Series</b> | Used in particulate environments free of oil aerosols.                                  |
| <b>R Series</b> | Used for oil and non-oil particles with time use limitations specified by NIOSH.        |
| <b>P Series</b> | Used for oil and non-oil particles with time use limitations specified by manufacturer. |

Per user instructions, the respirator needs to be correctly positioned on your face and head:

- Upper strap should be positioned on the crown of the head.
- Lower strap should be positioned below the ears.
- Noseclip should be completely molded to the shape of the nose using two hands.
- Always conduct a user seal check.
- Always follow the appropriate user and donning instructions for the specific model.

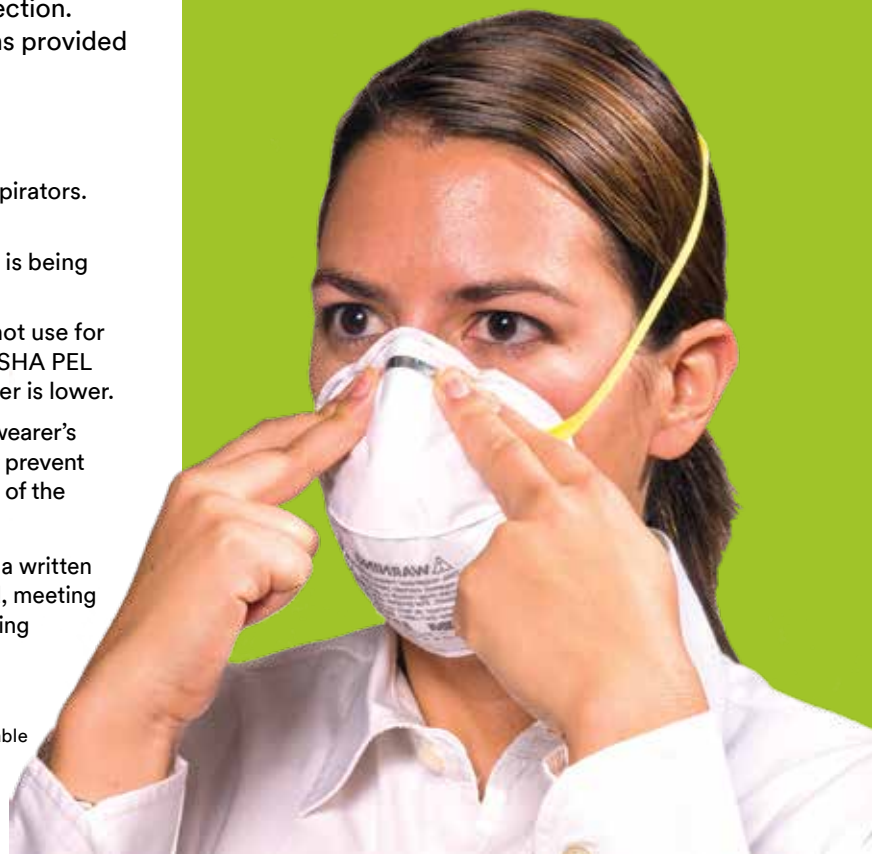


# Product Preference Selector


Use the selector below to identify which respirator may be preferred for increased worker comfort.

What type of particles are in your environment?

## Oil and Non-Oil R- or P-Series Respirators

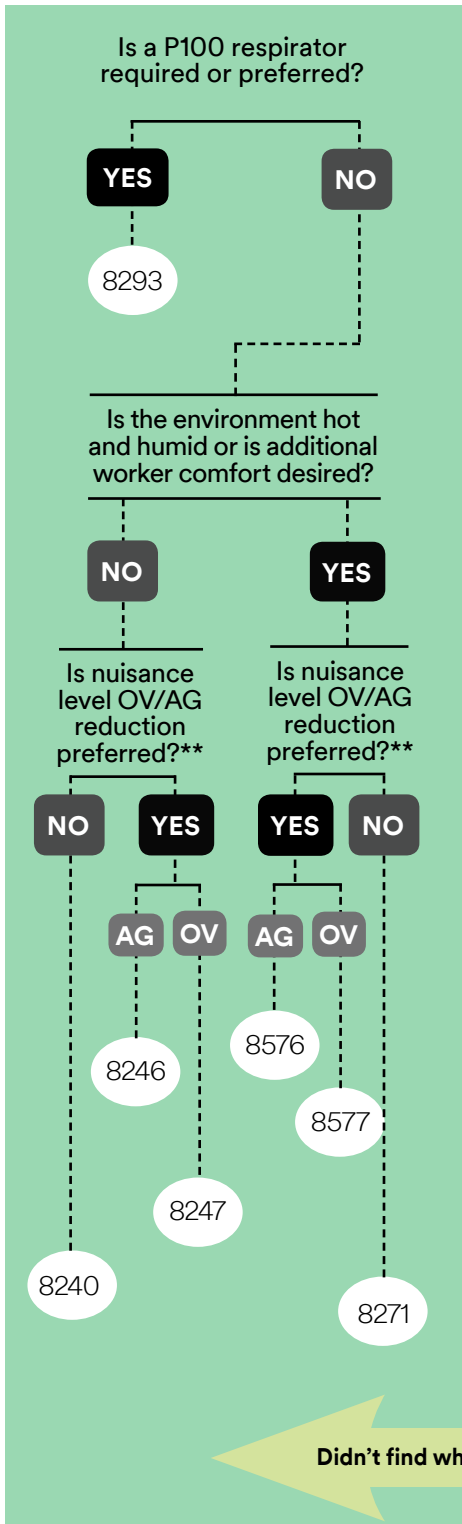

## Non-Oil N-Series Respirators

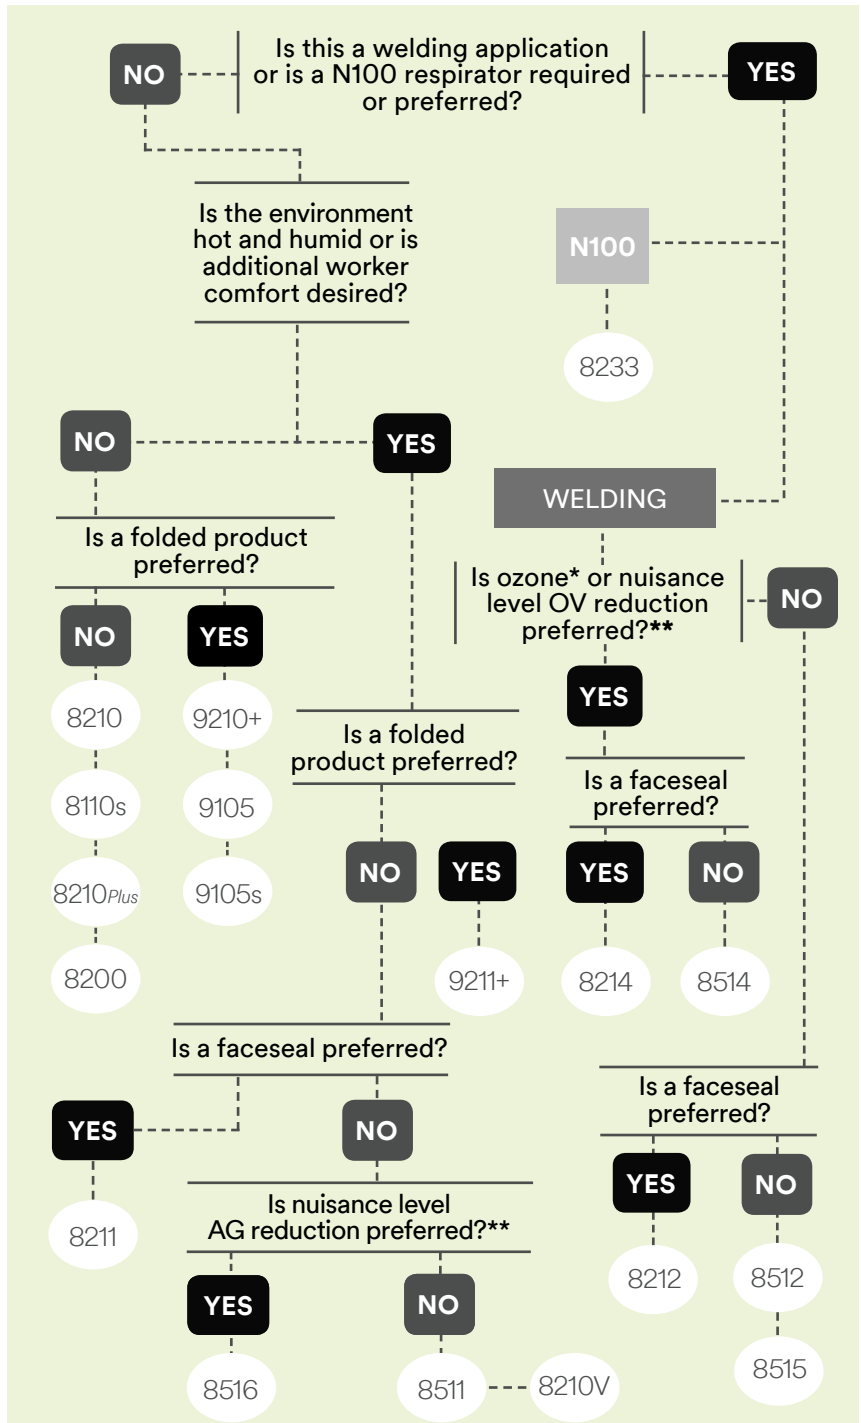

Didn't find what you want? Don't forget that R and P series respirators can also be used in non-oil environments.

\*3M recommended for ozone protection up to 10X OSHA PEL. Not NIOSH approved for ozone.  
 \*\*3M recommended for relief against nuisance level acid gas (AG) or organic vapors (OV).  
 Nuisance levels are less than OSHA PEL or applicable government occupational exposure limits, whichever is lower.

# Specialized solutions for harsh environments.

## R95 Respirators

R series are resistant to oil mist.

## P95 Respirators

P series respirators are oil-resistant and can be used wherever protection in oil environments is needed.

### 8247 (R95) AAD #07186

Helps provide comfortable protection against certain oil and non-oil based particles – including those with nuisance levels of **organic vapors\*\***, such as solvents, degreasers, and resins.

*Potential Applications: Foundry operations, lab settings, agriculture, petrochemical manufacturing and undercoating where particles and nuisance levels\* of organic vapors may be present.*



### 8577 (P95)

Helps provide comfortable, reliable worker protection against certain oil and non-oil based particles – including those with nuisance levels of **organic vapors\*\*** such as solvents, degreasers, and resins.

*Potential Applications: Foundry operation, lab settings, agricultural, petrochemical and manufacturing.*



### 8246 (R95)

Helps protect against certain oil and non-oil based particles – including those with nuisance levels of **acid gases\*\*** such as sulphur dioxide, hydrogen fluoride, and/or chlorine.

*Potential Applications: Glass etching, chemical processing paper processing, aluminum smelting and brewing operations where particles and nuisance levels of acid gases\* may be present.*



### 8576 (P95)

Helps provide comfortable, reliable worker protection against certain oil and non-oil based particles – including those with nuisance levels of **acid gases\*\*** such as sulphur dioxide, hydrogen fluoride, and/or chlorine.

*Potential Applications: Glass etching, chemical processing, paper processing, aluminum smelting and brewing operations.*



### 8240 (R95)

Helps protect against certain oil and non-oil based particles. Features a collapse-resistant shell for increased durability.

*Potential Applications: Grinding, sanding, sweeping, machining and other dust producing/oily operations.*



### 8271 (P95)

Helps protect against certain oil and non-oil based particles. It features a collapse-resistant shell for increased durability in most hot, humid conditions.

*Potential Applications: Grinding, sanding, sweeping, machining and other dust producing/oily operations.*



**IMPORTANT: All 3M products shown in this catalog must be used in accordance with the OSHA regulations and the user instructions, warnings, and limitations accompanying each product.**



#### Adjustable Buckle Straps

Get a comfortable, secure seal fast, with a single tug.



#### Welding Web

Unique filter media incorporating protective layers designed to be flame resistant as demonstrated per ASTM D2859-96. (Not a substitute for a faceshield.)



#### Carbon Filter Material

Greater comfort, more relief from odors, vapors and other gaseous contaminants. For nuisance level relief only.\*\*

\* 3M recommended for ozone protection up to 10X OSHA PEL. Not NIOSH approved for ozone.

\*\* 3M recommended for relief against nuisance level acid gas or organic vapors. Nuisance levels are less than OSHA PEL or applicable government occupational exposure limits, whichever is lower.

# 3M.com/disposable

Visit our website for more information: Online Medical Evaluations • Respiratory Management Program • Videos • Where to buy • Training tools. Plus download our Tech Bulletins.

## Product Ordering Information

Model	NIOSH Class	Stock Number UPC	Qty/ Box	Boxes/ Case	Case Qty
-------	-------------	---------------------	-------------	----------------	-------------

### Comfort

9105	N95	70-0715-6389-7 50051131 17397 7	50	8	400
9105s	N95	70-0715-6388-9 50051131 17394 6	50	8	400
8110s	N95	70-0707-5707-8 50051138 54305 6	20	8	160
8200	N95	70-0715-3449-2 50051131 07023 8	20	8	160
8210	N95	70-0706-1439-4 50051138 46457 3	20	8	160
8210Plus	N95	70-0710-9189-9 50051131 52924 8	20	8	160
9210+	N95	GT-5000-7298-5 5005113137192 2	20	12	240

### Comfort Plus

8210V	N95	70-0716-0658-9 50051131 49711 0	10	8	80
8211	N95	70-0710-4255-3 50051131 52750 3	10	8	80
8511	N95	70-0707-5755-7 50051138 54343 8	10	8	80
9211+	N95	GT-5000-7299-3 5005113137193 9	10	12	120

### 100 Class

8233	N100	70-0707-0901-2 5001138 541543 4	1	20	20
8293	P100	70-0707-5747-4 50051138 54336 0	1	20	20



**Why clock out to get checked out?**

Online Respirator Medical Evaluations

**Try 2 evaluations, FREE!**

Now your employees can stay onsite for their medical evaluation. Sign up, take the OSHA respirator medical evaluation questionnaire, and get instant results with the 3M Online Respirator Medical Evaluation Service. There's no minimum order or hidden costs. For a limited time, first time accounts can get two evaluations at no cost so you can see how convenient it is!

To learn more and receive two free evaluations, go to:  
**3M.com/OMEPromo**



**Personal Safety Division**  
3M Center  
Building 235-2NW-70  
St. Paul, MN 55144-1000

**3M Canada Company PSD**  
P.O. Box 5757  
London, Ontario N6A 4T1  
Canada

3M PSD products are for occupational use only.

Model	NIOSH Class	Stock Number UPC	Qty/ Box	Boxes/ Case	Case Qty
-------	-------------	---------------------	-------------	----------------	-------------

### Specialty

8240	R95	70-0708-4386-0 50051138 66297 9	20	6	120
8246	R95	70-0707-5771-4 50051138 54357 5	20	6	120
8247	R95	70-0707-5772-2 50051138 54358 2	20	6	120
8271	P95	70-0707-1083-8 50051138 54285 1	10	8	80
8576	P95	70-0707-5793-8 50051138 54370 4	10	8	80
8577	P95	70-0707-5794-6 50051138 54371 1	10	8	80

### Welding and Metal Pouring

8212	N95	70-0707-0899-8 50051138 54141 0	10	8	80
8214	N95	70-0707-9953-4 50051138 66192 7	10	8	80
8512	N95	70-0708-4387-8 50051138 66298 6	10	8	80
8514	N95	70-0708-4388-6 50051138 66299 3	10	8	80
8515	N95	70-0708-9002-8 50051131 07189 1	10	8	80
8516	N95	70-0708-4573-3 50051138 66392 1	10	8	80



**WARNING**

These respirators help reduce exposures to certain airborne particulates. Before use, the wearer must read and understand the *User Instructions* provided as a part of the product packaging. A written respiratory protection program must be implemented meeting all the requirements of OSHA 1910.134 including training, fit testing and medical evaluation. In Canada, CSA standards Z94.4 requirements must be met and/or requirements of the applicable jurisdiction, as appropriate. Misuse may result in sickness or death. For proper use, see package instructions, supervisor, or call 3M PSD Technical Service in USA at 1-800-243-4630 and in Canada at 1-800-267-4414.

### For More Information

Technical Assistance in US 1-800-243-4630  
Technical Assistance in Canada 1-800-267-4414  
[www.3M.com/workersafety](http://www.3M.com/workersafety)

3M, VFlex, and Cool Flow are trademarks of 3M Company, used under license in Canada. Please recycle. Printed in USA.  
© 2014, 2016 3M. All rights reserved.  
70-0714-8838-4