

Portable Construction Heater

Heavy duty construction provides maximum durability for work site conditions where temporary heat is required.

Features

- 160 CFM delivers powerful heat output
- Thermal overheat protection for safety
- 6 foot cord and plug stores around handle
- Stainless steel tubular element

Applications

- Portable heat for workshops, garages, construction sites



Ordering Guide



Cat. No.	Watts	BTU	Volts	CFM	Weight kg/lbs.
DCH4831A	4800	16377	240	160	4.4/9.7

Specifications

Voltage	240V
Wattage	4800W
Colour	Almond
Finish	Hybrid polyester epoxy powder coat paint.
Fan	Fan is propeller type accurately balanced and correctly pitched to optimize performance.
Control	Single pole thermostat is built-in temperature range of 7-25°C (45-77°F).
Warranty	One year on complete unit. CSA approved.



Dimensions

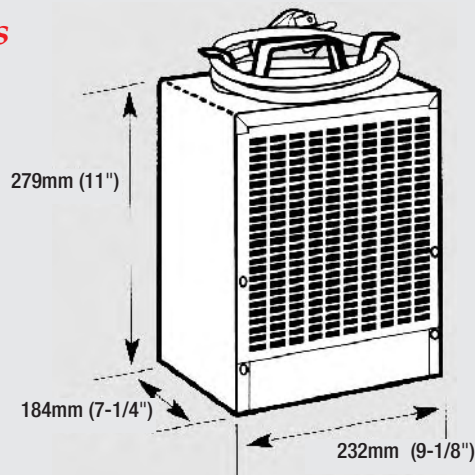

3 Prong
Polarized Plug
30 Amp