

# Copper-Clad Steel (CCS) Conductors

Copper-clad steel (CCS) conductors are composed of a steel core with a continuous and constant copper cladding that is thoroughly bonded throughout. CCS conductors combine the strength of steel with the high conductivity and corrosion resistance of copper.

CADWELD® welded electrical connections have been used to join CCS conductors for over 40 years. The CADWELD exothermic process fuses the CCS conductors together to form a connection that will not corrode, loosen, or increase in resistance for the intended service life of the installation. CCS conductors may also be welded to copper conductors, rebar or any other horizontal or vertical steel surface or structure for electrical grounding.

CADWELD welded electrical connections are preferable to mechanical connections for CCS conductors. Mechanical connections rely on the deformation of the conductors and the pressure exerted by the connector on the conductor to reduce the contact resistance. Since the core of CCS conductors is steel, a CCS conductor will not deform as much as a pure copper conductor and therefore an exothermically welded connection is better suited for this application.

## How to Order CADWELD® Products

This catalog lists the most popular CADWELD connections for copper-clad steel construction. Look in the index for the connection you need. If you cannot find the connection you need, contact ERICO® or your local distributor or agent.

### 1. What connection do you require?

Available connections are listed in the pictorial index, which also shows the degree of difficulty in making the connection, and ease of mold cleaning. We strongly recommend that wherever possible you use molds listed in this catalog. After selecting the connection, turn to the appropriate page and select the mold, welding material and tools you need.







### 2. What are the conductor sizes?





This catalog covers connections between copper-clad steel conductors to each other, to concentric stranded copper cable, to lugs, to ground rods, to rebar, and to rail. For sizes not listed, contact your local CADWELD distributor, agent, or ERICO.



**Note:** Other ERICO catalogs describe connections to conductors for solid or concentric stranded copper conductors, busbar, lightning protection cable, steel cable, etc.

### 3. You must have the following to make a weld:














1. CADWELD engineered mold.
2. Welding material required by your mold.
3. Handle clamps and or frame.
4. CADWELD® PLUS control unit or flint ignitor.
5. Lugs, sleeves, packing material listed on the page with the mold as required.



<b>CABLE TO CABLE</b>					
Name	Page	Type		Ease	Split
Horizontal Splice	5	SS		1	Vertical
Horizontal Tee	6	TA		1	Horizontal
Horizontal X, Same Plane	9	XA		1	Horizontal
Horizontal X	9	XB		1	Horizontal
Parallel Tap	10	PT		1	Vertical
Horizontal Parallel	11	PC		1	Vertical

<b>CABLE TO GROUND ROD</b>					
Name	Page	Type		Ease	Split
Ground Rod Splice	12	GB		1	Vertical
Cable to Ground Rod - Tap	13	GR		1	Vertical
Cable to Ground Rod - Through	15	GT		1	Vertical
Cable to Ground Rod - Through / Side	17	GY		1	Vertical

<b>CABLE TO LUG</b>					
Name	Page	Type		Ease	Split
Cable to Lug	28	GL		1	Vertical
Cable to Lug	29	LA		1	Horizontal




<b>CABLE TO STEEL</b>					
Name	Page	Type		Ease	Split
Horizontal Steel Surface	19	HA		1	*
Horizontal Steel Surface	19	HS		1	*
Horizontal Steel Pipe	20	HA, Pipe		1	*
Horizontal Steel Surface	21	HC		1	*
Horizontal Steel Surface	22	HT		1	*
Vertical Steel Surface	22	VS		1	Vertical
Vertical Steel Pipe	23	VS, Pipe			Vertical
Vertical Steel Surface	24	VF			Vertical
Vertical Steel Surface	24	VB			Vertical
Vertical Steel Surface	25	VT			*
Vertical Steel Surface	25	VG			*
Vertical Steel Surface	26	VV			Vertical
Vertical Steel Surface	27	VN			*

<b>CABLE TO STUD</b>					
Name	Page	Type		Ease	Split
Steel or Copper Studs to Steel Surface	31	HX		1	Vertical
Steel or Copper Studs to Steel Surface	31	HV		1	Horizontal


# The CADWELD® Mold Numbering System

The CADWELD® mold part number gives, in code, the complete information of the mold – type of connection, mold price key, and conductor size(s).

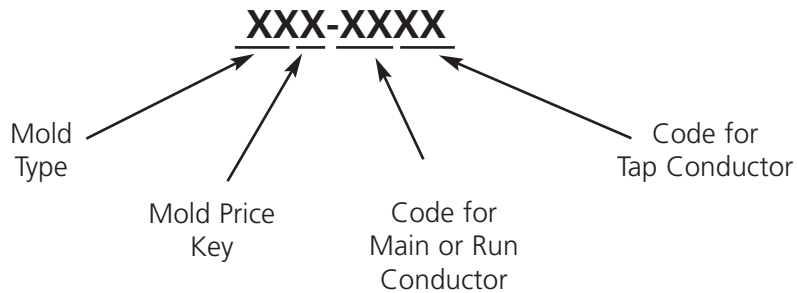


## EXAMPLES


### TAC-9F9C




### GTC-P16 9H



### SSC-9F



### VSC-9D-V5C



## Certain tools may be required for various connections.

If required, these tools are listed on the same page as the connection and in Section A.

- Some tools listed in Section A can save you a lot of time.
- Also refer to A9E, Contractor Tips, to make your job easier, and learn about labor saving ideas.

## REQUIRED TOOLS SUMMARY


Required tools are listed with each mold. For your reference, handle clamps and/or frame are summarized below.

<u>MOLD</u>	<u>REQUIRED</u>
A*	Includes frame with handle
C, Q & R	Requires L160
D, F & Z	Requires L159
E*	Includes frame but also requires L160
J*	Includes frame but also requires L159
K*, M* & V*	Includes frame with handles

\* To order mold only - without handles or frame - add suffix "M" to mold part number.



## For Stranded Copper-Clad Steel Conductors

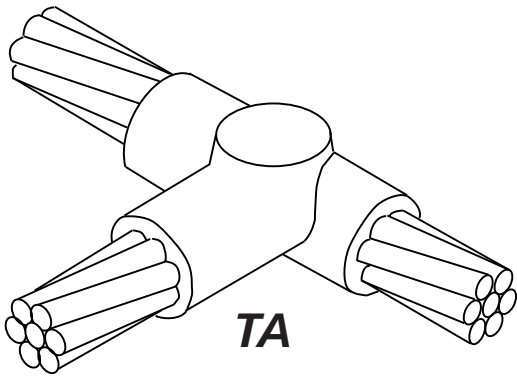

### HORIZONTAL TEE CONNECTIONS

- Tee of horizontal run and tap cables.
- Concentric stranded copper cable unless otherwise noted.
- Solid conductor may be copper or copper-clad.
- **Bold letter** in mold part number is the price key.

### REQUIRED TOOLS

	Part No.
Handle Clamps	L160
for C Price Key Molds	L159
for D Price Key Molds	
CADWELD® PLUS Control Unit or Flint Ignitor	PLUSCU T320

### SUGGESTED TOOLS

Cable Cleaning Brush	T313 or T314
Slag Removal Spade	B136A or B136B
Mold Cleaning Brush	T394
Cable Clamp	B265
Torch Head	T111

### ACCESSORIES

- See Section A

CABLE SIZE (sq mm)		MOLD PART NO.	WELDING MATERIAL <sup>1</sup>
Run	Tap		
7/#10	7/#10	TAC <b>9</b> A9A	45
7/#8	7/#8	TAC <b>9</b> B9B	65
	7/#10	TAC <b>9</b> B9A	45
	2/0*	TAC <b>9</b> B2G	65
	4/0*	TAC <b>9</b> B2Q	90
7/#7	7/#7	TAC <b>9</b> C9C	90
	7/#8	TAC <b>9</b> C9B	90
	7/#10	TAC <b>9</b> C9A	45
	2/0*	TAC <b>9</b> C2G	90
	4/0*	TAC <b>9</b> C2Q	115
7/#6	7/#6	TAC <b>9</b> D9D	115
	7/#7	TAC <b>9</b> D9C	90
	7/#8	TAC <b>9</b> D9B	90
	7/#10	TAC <b>9</b> D9A	45
	2/0*	TAC <b>9</b> D2G	90
	4/0*	TAC <b>9</b> D2Q	115
	7/#5	7/#5	TAC <b>9</b> E9E
7/#6		TAC <b>9</b> E9D	115
7/#7		TAC <b>9</b> E9C	90
7/#8		TAC <b>9</b> E9B	90
7/#10		TAC <b>9</b> E9A	90
2/0*		TAC <b>9</b> E2G	90
4/0*		TAC <b>9</b> E2Q	150

CABLE SIZE (sq mm)		MOLD PART NO.	WELDING MATERIAL <sup>1</sup>
Run	Tap		
19/#9	19/#9	TAC <b>9</b> F9F	150
	7/#5	TAC <b>9</b> F9E	150
	7/#6	TAC <b>9</b> F9D	150
	7/#7	TAC <b>9</b> F9C	90
	7/#8	TAC <b>9</b> F9B	90
	2/0*	TAC <b>9</b> F2G	90
	4/0*	TAC <b>9</b> F2Q	150
	19/#8	19/#8	TAC <b>9</b> G9G
19/#9		TAC <b>9</b> G9F	150
7/#5		TAC <b>9</b> G9E	150
7/#6		TAC <b>9</b> G9D	150
7/#7		TAC <b>9</b> G9C	90
7/#8		TAC <b>9</b> G9B	90
2/0*		TAC <b>9</b> G2G	90
4/0*		TAC <b>9</b> G2Q	150

<sup>1</sup> For CADWELD® PLUS add suffix "PLUSF20" (refer page 44)  
\*Concentric stranded copper cable

<sup>1</sup> For CADWELD® PLUS add suffix "PLUSF20" (refer page 44)  
\*Concentric stranded copper cable

## For Stranded Copper-Clad Steel Conductors

CABLE SIZE (sq mm)		MOLD PART NO.	WELDING MATERIAL <sup>1</sup>
Run	Tap		
19/#7	19/#7	TAC9H9H	200
	19/#8	TAC9H9G	200
	19/#9	TAC9H9F	200
	7/#5	TAC9H9E	150
	7/#6	TAC9H9D	150
	7/#7	TAC9H9C	90
	7/#8	TAC9H9B	90
	2/0*	TAC9H2G	90
	4/0*	TAC9H2Q	150
	500*	TAC9H3Q	250
19/#6	19/#6	TAC9J9J	2-150
	19/#7	TAC9J9H	200
	19/#8	TAC9J9G	200
	19/#9	TAC9J9F	200
	7/#5	TAC9J9E	150
	7/#6	TAC9J9D	115
	2/0*	TAC9J2G	90
	4/0*	TAC9J2Q	150
500*	TAC9J3Q	2-150	
2/0*	19/#6	TAC2G9J	115
	19/#7	TAC2G9H	115
	19/#8	TAC2G9G	115
	19/#9	TAC2G9F	115
	7/#5	TAC2G9E	115
	7/#6	TAC2G9D	90
	7/#7	TAC2G9C	90
	7/#8	TAC2G9B	90
	7/#10	TAC2G9A	65

CABLE SIZE (sq mm)		MOLD PART NO.	WELDING MATERIAL <sup>1</sup>
Run	Tap		
4/0*	19/#6	TAC2Q9J	150
	19/#7	TAC2Q9H	150
	19/#8	TAC2Q9G	150
	19/#9	TAC2Q9F	150
	7/#5	TAC2Q9E	150
	7/#6	TAC2Q9D	150
	7/#7	TAC2Q9C	90
	7/#8	TAC2Q9B	90
	7/#10	TAC2Q9A	90
	250*	19/#6	TAC2V9J
19/#7		TAC2V9H	150
19/#8		TAC2V9G	150
19/#9		TAC2V9F	150
7/#5		TAC2V9E	150
7/#6		TAC2V9D	150
7/#7		TAC2V9C	90
7/#8		TAC2V9B	90
7/#10		TAC2V9A	90
500*		19/#6	TAD3Q9J
	19/#7	TAC3Q9H	250
	19/#8	TAC3Q9G	200
	19/#9	TAC3Q9F	200
	7/#5	TAC3Q9E	200
	7/#6	TAC3Q9D	150
	7/#7	TAC3Q9C	115
	7/#8	TAC3Q9B	115


<sup>1</sup> For CADWELD® PLUS add suffix "PLUSF20" (refer page 44)

\*Concentric stranded copper cable

<sup>1</sup> For CADWELD® PLUS add suffix "PLUSF20" (refer page 44)


\*Concentric stranded copper cable

## CADWELD® MOLDS



A semi-permanent graphite mold is used for making most CADWELD Connections. The mold controls the direction and speed of the molten CADWELD welding material flow and its final solidified shape. The graphite used in a CADWELD mold is a high temperature type that lasts for an average of 50 or more CADWELD connections under normal usage.

### Wear Plates

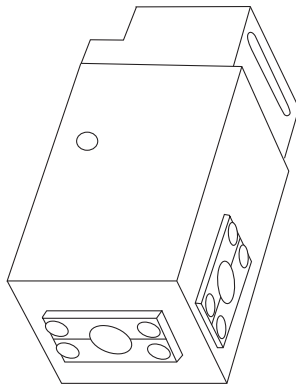

Wear Plates reduce mechanical abrasion of molds at cable entry points and help prevent leakage of molten metal (particularly on larger 7 strand conductor). These features prolong mold life.

Most CADWELD molds are available with factory mounted wear plates for the following sizes:

Copper-clad steel conductors: 7/#10 thru 19/#6

Ground rods: 1/2" thru 1"

To order WEAR PLATES specify: Mold Part No. followed by the suffix "-W" i.e., TAC9F9FW.

Not available with types HA, HB, HC, LJ, certain PTs, & PCs, RR, VB, VF, VG VN, XA, CXBQ or XBZ.


Following are the number of Wear Plates (W.P.) used on the various types listed in this catalog.

TYPE	W.P.	TYPE	W.P.	TYPE	W.P.
GB	1	HT	2	RC	2
GB-GR	2	LA	1	RD	2
GB-GT	3	LE	2	SS	2
GL	1	LL	1*	TA	3
GR	2	PC	2**	VS	1
GT	3	PT	2**	VT	2
GY	3	RA	1	VV	1
HS	1	RB	2	XB	4

\*Available only on molds for 2" and narrower bus size.

\*\*Available only on mold for 7/#10 and larger run and tap.

### Split Crucible Molds




Molds made with a horizontal opening and solid crucible section may be specified as a SPLIT CRUCIBLE TYPE. The SPLIT CRUCIBLE MOLD allows for easier cleaning, but lead times are longer.

To order a SPLIT CRUCIBLE TYPE specify: Mold Part No. followed by the suffix "-L" i.e., TAC2Q2QL.

Available in Type TA, XA, XB, (C & D mold price only), LE and LJ connections.


MOLD FASTENING AND MOUNTING



**CADWELD® Handle Clamps**

Handle Clamps such as the one shown are required for most molds. Specialized frames with handles are used on some molds. Flint ignitors are included with all Handle Clamps. The following Handle Clamps are most widely used.


1. L160 for all molds having a "C", "E", "Q", or "R" mold price key. (3" wide molds)
2. L159 for all molds having a "D", "F", "J" or "Z" mold price key. (4" wide molds)



**Vertical Surface Mold Support**

The CADWELD mold can be securely held to a vertical "H" column or angle by using the Vertical Surface Mold Support. It is easily attached to an existing L159 or L160 Handle Clamp. For use with Types VB, VG, VN, and VS molds, fits steel up to 1" thick, for Type VF mold, 3/4" thick.

- B134: For use with L160 E-Z CHANGE Handle Clamp
- B135: For use with L159 E-Z CHANGE Handle Clamp



**Chain Support Handle Clamps**

The CADWELD mold can be securely held to a pipe using the clamp assembly consisting of a modified L159 or L160 Handle Clamp with built-in Pipe Attachment.

Clamp Part No.	Fits Mold Price	For Following Connection Types	Pipe
B159V	D & F	VS, VF, VB, & VV	Vertical
B160V	C & R	VS, VF, VB, & VV	Vertical
B159VT	D & F	VT	Vertical
B160VT	C & R	VT	Vertical
B159H	D & F	HA, HS, HC, & HT	Horizontal
B160H	C & R	HA, HS, HC, & HT	Horizontal

The above clamps are equipped with 20" length of chain which will fit up to 4" pipes. Extra 20" length of chain, B158, is available to fit up to 10" pipes.





# Technical Information

## COPPER-CLAD STEEL CONDUCTORS

CADWELD® Cable Code	Cable Stranding	Nominal Dia. (inches)	Cross Sectional Area (kcmil)
7Y	3/#10	.220	31.15
7X	3/#9 CW	.247	39.28
9Y	3/#8 CW	.277	49.53
9A	7/#10 CW	.306	72.68
9X	3/#7 CW	.311	62.45
9T	7/#9 CW	.343	91.65
9W	3/#6 CW	.349	78.75
9B	7/#8 CW	.385	115.60
9V	3/#5 CW	.392	99.31
9C	7/#7 CW	.433	145.70
9D	7/#6 CW	.486	183.80
9E	7/#5 CW	.546	231.71
9F	19/#9 CW	.572	248.80
9L	7/#4 CW	.613	292.20
9G	19/#8 CW	.642	313.70
9H	19/#7 CW	.721	395.50
7W	37/#9 CW	.801	484.40
9J	19/#6 CW	.810	498.80
7V	37/#8 CW	.899	610.90
9K	19/#5 CW	.910	628.90
9M	37/#7 CW	1.010	770.30

## GROUND RODS

Nominal Size	Material	Type	Thread Size	Rod Diameter	CADWELD Ground Rod Code
1/2 "	Copper-bonded	Sectional	9/16 "	.505	14
	Steel*	Plain	–	.500	14
	Copper-bonded	Plain	–	.475	15
	Copper-bonded	Sectional	1/2 "	.447	13
5/8 "	Copper-bonded	Sectional	5/8 "	.563	16
	Steel*	Plain	–	.625	31
	Galvanized Steel**	Plain	–	.631	31
	Copper-bonded	Plain	–	.563	16
3/4 "	Copper-bonded	Sectional	3/4 "	.682	18
	Steel*	Plain	–	.750	33
	Copper-bonded	Plain	–	.682	18
1 "	Copper-bonded	Sectional	1 "	.914	22
	Steel*	Plain	–	1.00	37
	Copper-bonded	Plain	–	.914	22

\* Plain steel, stainless steel and stainless steel clad rods.

\*\* Manufactured in accordance with NEMA GR-1.

# Technical Information

## BARE CLASS A, B, AND C CONCENTRIC STRANDED CONDUCTOR

Based on A.S.T.M. Standard Specifications.

CADWELD® Cable code	Size in Circular mils	Size A.W.G.	Conductor Dia. In.	NUMBER OF WIRES / Strand Dia. Inches				
				7	19	37	61	91
<b>4Y</b>	1,000,000		1.152			.1644*	.1280	.1048
<b>4Q</b>	800,000		1.031			.1470*	.1145	.0938
<b>4L</b>	750,000		.998			.1424*	.1109	.0908
<b>4G</b>	700,000		.964			.1375*	.1071	.0877
<b>3X</b>	600,000		.893			.1273	.0992	.0812
<b>3Q</b>	500,000		.813		.1622*	.1162	.0905	
<b>3H</b>	400,000		.728		.1451	.1040	.0810	
<b>3D</b>	350,000		.681		.1357	.0973	.0757	
<b>3A</b>	300,000		.630		.1257	.0900	.0701	
<b>2V</b>	250,000		.575		.1147	.0822	.0640	
<b>2Q</b>	211,600	4/0	.528	.1739	.1055	.0756		
<b>2L</b>	167,800	3/0	.470	.1548	.0940	.0673		
<b>2G</b>	133,100	2/0	.419	.1379	.0837	.0600		
<b>2C</b>	105,500	1/0	.373	.1228	.0745	.0534		
<b>1Y</b>	83,690	1	.332	.1093	.0664	.0476		
<b>1V</b>	66,370	2	.292	.0974	.0591			
<b>1Q</b>	52,630	3	.260	.0867	.0526			
<b>1L</b>	41,740	4	.232	.0772	.0469			
<b>1H</b>	26,240	6	.184	.0612	.0372			
<b>1E</b>	16,510	8	.146	.0486	.0295			
<b>1B</b>	10,380	10	.116	.0385	.0234			
	6,530	12	.092	.0305	.0185			
	4,110	14	.073	.0242	.0147			

\* Class AA

## BARE SOLID COPPER WIRE

Based on A.S.T.M. Standard Specifications

CADWELD Cable code	Size A.W.G.	Cross Sectional Area Circular Mils	Wire Dia. In.
<b>2P</b>	4/0	211,600	.4600
<b>2K</b>	3/0	167,800	.4096
<b>2F</b>	2/0	133,100	.3648
<b>2B</b>	1/0	105,500	.3249
<b>1X</b>	1	83,690	.2893
<b>1T</b>	2	66,370	.2576
<b>1P</b>	3	52,630	.2294
<b>1K</b>	4	41,740	.2043
<b>1G</b>	6	26,250	.1620
<b>1D</b>	8	16,510	.1285
<b>1A</b>	10	10,380	.1019
	12	6,530	.0808
	14	4,110	.0664



# Technical Information

## RECTANGULAR COPPER BUSBAR

CADWELD® Busbar Code	Thickness Inches	Width Inches	Circular Mil Size	Weight Lbs. per Foot
CE CG CH	1/8	1 1-1/2 2	159,200 238,700 318,300	.484 .726 .969
DE DH	3/16	1 2	238,700 477,500	.727 1.45
EE EG EH EK EM	1/4	1 1-1/2 2 3 4	318,300 477,500 636,600 954,900 1,273,000	.969 1.45 1.94 2.91 3.88
GE GG GH GK GM	3/8	1 1-1/2 2 3 4	477,500 716,200 954,900 1,432,000 1,910,000	1.45 2.18 2.91 4.36 5.81
JH JK JM	1/2	2 3 4	1,273,000 1,910,000 2,546,000	3.88 5.81 7.75

## CAST IRON PIPE – CLASS A THRU D

AWWA Specification 1908,  
ASA A21.2 Class 100-250.

Nominal Size (Inches)	Actual O.D. (Inches)
4	4.80 to 5.00
6	6.90 to 7.10
8	9.05 to 9.30
10	11.10 to 11.40
12	13.20 to 13.50
14	15.30 to 15.70
16	17.40 to 17.80
18	19.50 to 19.90
20	21.60 to 22.1
24	25.80 to 26.30
30	31.70 to 32.70
36	38.00 to 39.20
42	44.20 to 45.60
48	50.50 to 52.00
54	56.70 to 58.40
60	62.80 to 64.80
72	75.30 to 76.90
84	87.50 to 88.50

## Other Standard Sections used for Fence Posts

Section	CADWELD Mold Code
1-1/2" square	PS15
2" square	PS20
2-1/2" square	PS25
3" square	PS30*
1.875 x 1.625 x .133 "H"	PH1
2.25 x 1.95 x .143 "H"	PH2

\* For D or F mold price only

# Technical Information

## STANDARD STEEL WIRE GAGE

### (WASHBURN MOEN GAGE) SOLID

Gage No.	Dia. Inches	Gage No.	Diameter Inches
7/0	.4900	6	.1920
6/0	.4615	7	.1770
5/0	.4305	8	.1620
4/0	.3938	9	.1483
3/0	.3625	10	.1350
2/0	.3310	11	.1205
1/0	.3065	12	.1055
1	.2830	13	.0915
2	.2625	14	.0800
3	.2437	15	.0720
4	.2253	16	.0625
5	.2070	17	.0540

## STEEL PIPE SIZES

STANDARD WEIGHT  
(SCHEDULE 40)

ASTM A53-90-B  
ANSI/ASME B36.10M-1985

Nominal Size In	O.D. Inches	Wall Thickness Inches	CADWELD Mold Code
1	1.315	.133	1
1-1/4	1.660	.140	1.25
1-1/2	1.900	.145	1.50
2	2.375	.154	2
2-1/2	2.875	.203	2.50
3	3.500	.216	3
3-1/2	4.000	.226	3.50
4	4.500	.237	4
5	5.563	.258	5
6	6.625	.280	6
8	8.625	.322	8
10	10.750	.365	10

