

DEWALT®

ENGINEERED BY Powers™



UL & FM FULL LISTING
PAGES 10-11

THREAD PROFILE


low torque,
fast installation,
full concrete
engagement

STANDARD 1/4" BIT

no need for
specialty bit for
installation

HARDENED STEEL

installs in hard
concrete and
remains ductile

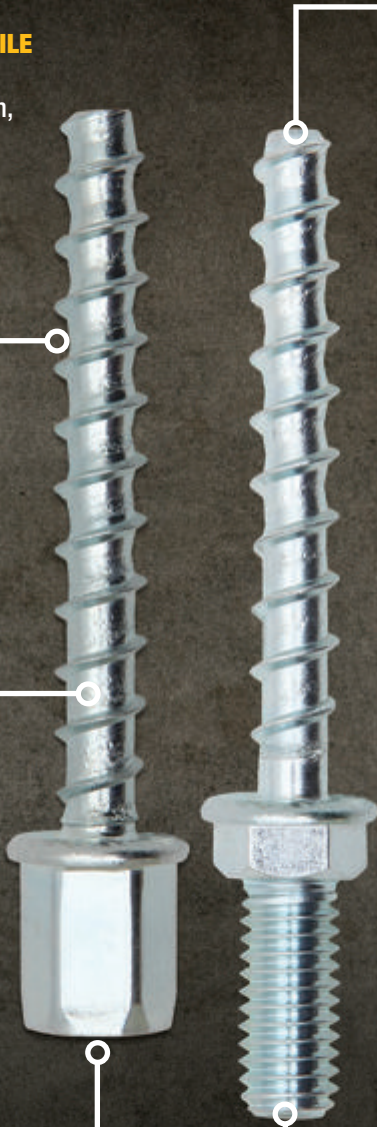

THREADED ROD
available in 1/4"
or 3/8" rod sizes

**EXTERNAL
3/8" THREAD**
for attaching
directly to
anchor



	DEWALT Hangermate+	ITW Buildex Sammys®
Approved Embedments	1-5/8" & 2-1/2"	2-1/4"
Bit Size	1/4" ANSI	Specialty
Pullout, N _{p,cr} *	1412 lbs	857 lbs

* for 2-1/2" embedment

Sammys® is a registered trademark of Illinois Tool Works Inc.

Faster Installation

Hangermate+ VS Drop-In Anchor**

25%
Faster Installation

DEWALT
Hangermate+
for Concrete

Traditional
Drop-in
Anchor

** 1/4"x1-5/8" concrete screw (with 3/8" coupler head) versus
3/8" Drop-In anchor

Installation Driver and Bit Reference

CAT #	DESCRIPTION	DRIVER	BIT
Hangermate+ Concrete - Internally Threaded			
PFM2211100	1/4" x 1-5/8"	PFM1491050	DW5517
PFM2211200	1/4" x 1-5/8"	PFM1491100	DW5517
PFM2211250	1/4" x 2-1/2"	PFM1491100	DW5517
Hangermate+ For Concrete - Externally Threaded			
PFM1421000	1/4" x 1-5/8"	DW22862	DW5517
PFM1421050	1/4" x 2-1/2"	DW22862	DW5517
Pivot For Concrete - Angled Applications			
PFM2281300	1/4 x 2"	PFM2201250	02796SD
Suspender For Concrete - Dual-Directional			
PFM2271050	5/16" x 2-1/4"	PFM2201300	DW5517



Hangermate®+

Rod Hanging Anchors for Concrete

	CAT #	DESCRIPTION	SAMMYS® MODEL #	HANG	ROD SIZE	QTY	MSTR
Hangermate+ For Concrete - Internally Threaded							
	PFM2211100	1/4" x 1-5/8"	CST 200	Vertical	1/4"	25	125
	PFM2211200	1/4" x 1-5/8"	CST 20	Vertical	3/8"	25	125
	PFM2211250	1/4" x 2-1/2"	CCST 516	Vertical	3/8"	25	125
Hangermate+ For Concrete - Externally Threaded							
	PFM1421000	1/4" x 1-5/8"	-	Vertical	3/8"	25	125
	PFM1421050	1/4" x 2-1/2"	-	Vertical	3/8"	25	125
Hangermate+ Pivot For Concrete - Angled Applications							
	PFM228130	1/4 x 2"	SH-GST/CST 20	Variable	3/8"	25	125
Hangermate+ Suspender For Concrete - Dual-Directional							
	PFM2271050	5/16" x 2-1/4"	-	Vert. & Hori.	3/8"	25	125

The Complete Anchoring Solution - Installation Accessories and Tools

	CAT #	DESCRIPTION	HANGERMATE+	QTY	MSTR QTY
	PFM1491050	1/4" Socket Driver	Concrete Rod Hanger	1	5
	PFM1491100	3/8" Socket Driver	Concrete Rod Hanger	1	5
	DW22862	1/2" Drive Socket	Externally Threaded Concrete Rod Hanger	1	-
	PFM2201300	Suspender Driver	Suspender	1	5
	PFM2201250	Pivot Driver	Pivot	1	5
	DWMT73934B	1/2" Impact Rated® Deep Socket	External	1	-
	DW2547IR	1/4" Hex to 1/2" Square Adapter			
	DW5517	1/4" X 6" (4" usable length) SDS+ Full Head Carbide Masonry Drill Bit			
	02796SD	Hex Shank SDS-Plus (only for Pivot for Concrete)			
	PFM2201050	Adapter for hanging 1/2" rod (3/8" to 1/2" Adapter)			
	DCH273P2DH	20V MAX* Brushless Rotary Hammer			
	DCF887D2	20V MAX* XR Brushless 3-Speed Impact Driver			
	DCF883M2	20V MAX* Lithium Ion 3/8" Impact Wrench			
	DCS350D1	Cordless Threaded Rod Cutter			

* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.