



Fig. 200 - "Trimline" Adjustable Band Hanger (B-Line Fig. B3170NF)

Fig. 200F - "Trimline" Adjustable Band Hanger with Felt Lining (B-Line Fig. B3170NFF)

Fig. 200C - "Trimline" Adjustable Band Hanger with Plastic Coated (B-Line Fig. B3170NFC)

Fig. 200S - "Trimline" Adjustable Band Hanger with Non-Captured Nut

Size Range:

Fig. 200 - 1/2" (15mm) thru 8" (200mm) pipe

Material: Steel, Pre-Galvanized to G90 specifications

Function: For fire sprinkler and other general piping purposes. Knurled swivel nut design permits hanger adjustment after installation.

Features:

- (1/2" (15mm) thru 2" (50mm)) Flared edges ease installation for all pipe types and protect CPVC plastic pipe from abrasion. Captured design keeps adjusting nut from separating with hanger. Hanger is easily installed around pipe.
- For hanger with non-captured nut order Fig. 200S.
- (2 1/2" (65mm) thru 8" (200mm)) Spring tension on nut holds it securely in hanger before installation. Adjusting nut is easily removed.

Approvals: Underwriters Laboratories listed (1/2" (15mm) thru 8" (200mm)) in the USA (**UL**) and Canada (**cUL**) for steel and CPVC plastic pipe and Factory Mutual Engineering Approved (**FM**) (3/4" (20mm) thru 8" (200mm)). Conforms to Federal Specifications WW-H-171E & A-A-1192A, Type 10 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 10.

Maximum Temperature: 650°F (343°C)

Finish: Pre-Galvanized. Stainless Steel materials will be supplied with (2) hex nuts in place of a knurl nut.

Order By: Figure number and pipe size

Designed to meet or exceed requirements of FM DS 2-0.

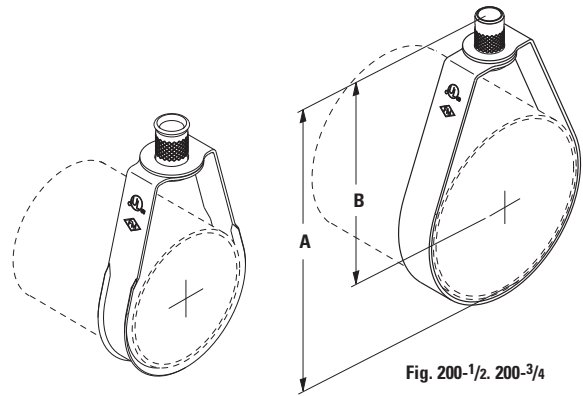


Fig. 200-1 to 200-2

Fig. 200-1/2, 200-3/4
Fig. 200-2 1/2 to 200-8



Fig. 200C



Fig. 200F



Fig. 200



Fig. 200S

Pipe Hangers

Part No.	Pipe Size in. (mm)	Rod Size	A in. (mm)	B in. (mm)	Approx. Wt./100 lbs. (kg)
200-1/2	1/2" (15)	3/8"-16	3 1/8" (79.4)	2 5/8" (66.7)	11 (5.0)
200-3/4	3/4" (20)	3/8"-16	3 1/8" (79.4)	2 1/2" (63.5)	11 (5.0)
200-1	1" (25)	3/8"-16	3 3/8" (85.7)	2 5/8" (66.7)	12 (5.5)
200-1 1/4	1 1/4" (32)	3/8"-16	3 3/4" (94.0)	2 7/8" (73.0)	13 (5.9)
200-1 1/2	1 1/2" (40)	3/8"-16	3 7/8" (98.4)	2 7/8" (73.0)	14 (6.4)
200-2	2" (50)	3/8"-16	4 1/2" (114.3)	3" (76.3)	15 (6.9)
200-2 1/2	2 1/2" (65)	3/8"-16	5 5/8" (142.9)	4 1/8" (104.7)	27 (12.3)
200-3	3" (75)	3/8"-16	5 7/8" (149.1)	4" (101.6)	29 (13.3)
200-3 1/2	3 1/2" (90)	3/8"-16	7 3/8" (187.3)	5 1/4" (133.3)	34 (15.6)
200-4	4" (100)	3/8"-16	7 3/8" (187.3)	5" (127.0)	35 (16.0)
200-5	5" (125)	1/2"-13	9 1/8" (231.8)	6 1/4" (158.7)	66 (30.2)
200-6	6" (150)	1/2"-13	10 1/8" (257.2)	6 3/4" (171.4)	73 (33.4)
200-8	8" (200)	1/2"-13	13 1/8" (333.4)	8 3/4" (222.2)	136 (62.3)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.