


GFR

FAN-FORCED WALL HEATERS CLIP-N-FIT® FEATURE

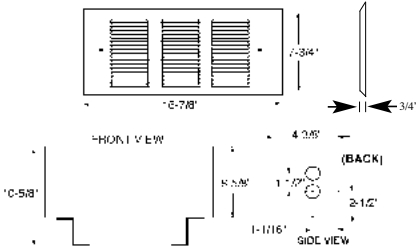

GRILLE: 16 7/8" W X 7 3/4" H X 3/4" D
BACK BOX: 14 3/8" W X 6 5/8" H X 4 3/8" D

MOUNTING LIMITATIONS

For wall mounting only. Do not install back box closer than 4 inches from floor, 6 inches from adjacent walls and 36 inches from the ceiling. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where airflow may be obstructed. To insure proper operation, maintain 5-foot minimum clearance to furniture or other objects placed directly in front of the heater.

APPLICATIONS

Fast heat response, contemporary design and very quiet operation make GFR Series fan forced heaters ideal for bedrooms, dens, basements, converted attics, breeze ways, garages, bathrooms, small offices, workshops, and other similar areas. Also adaptable to multiple installations in somewhat large or odd shaped room.

CLIP-N-FIT® FEATURE

Patented Clip-N-Fit® feature (US Patented No. 6,172,343) allows the installer to change the wattage of the heater to a lower output without moving jumper wire. Each heater is factory wired for its maximum wattage. To change wattage, clip out either jumper 1 or 2 as shown in the installation manual for desired wattage. This Patented Clip-N-Fit® feature also prevents the operator to change wattage after installation to a higher wattage.

CATALOG NUMBER	UPC	VOLTS	CFM	PHASE	WATTAGE	UNIT AMPS	SHIP WT.	BUILT-IN T-STAT
GFR1500	03368 6	120	45	1	1500/750 1125/375	12.5/6.3 9.4/3.1	10 lbs.	No
GFR2004	03372 3	240*	45	1	2000/1000 1500/500	8.3/4.2 6.3/2.1	10 lbs.	No
GFR2404	03375 4	240*	45	1	2400/1200	10.0/5.0	10 lbs.	No
GFR1500T2	03369 3	120	45	1	1500/750 1125/375	12.5/6.3 9.4/3.1	11 lbs.	Dbl. Pole
GFR2004T2	03374 7	240*	45	1	2000/1000 1500/500	8.3/4.2 6.3/2.1	11 lbs.	Dbl. Pole
GFR2404T2	03377 8	240*	45	1	2400/1200	10.0/5.0	11 lbs.	Dbl. Pole

* Will operate on 208V at 75% of rated wattages

ACCESSORIES (OPTIONAL)

CATALOG NUMBER	UPC	DESCRIPTION
GFR1500	6-85360	Single Pole Built-In Thermostat
GFR2004	03367 9	25 Amps @ 120-240V 45° - 85°F Range
GFR2404	03366 2	Double Pole version of above
GFRSM	05926 6	Surface Mounting Frame




QFG

FAN-FORCED WALL HEATERS CLIP-N-FIT® FEATURE*



Patented Clip-N-Fit® feature
 (US Patented No. 6,172,343)

GRILLE: 16 7/8" W X 7 3/4" H X 3/4" D
BACK BOX: 14 3/8" W X 6 5/8" H X 4 3/8" D

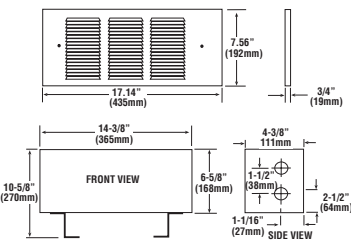

MOUNTING LIMITATIONS

For wall mounting only. Do not install back box closer than 4 inches from floor, 6 inches from adjacent walls and 36 inches from the ceiling. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where airflow may be obstructed. To insure proper operation, maintain 5-foot minimum clearance to furniture or other objects placed directly in front of the heater.

APPLICATIONS

RESIDENTIAL: QFG Series electric in-wall heaters are suitable for use in almost any room. Use single heaters in smaller rooms such as bedrooms and bathrooms. Use multiple heaters (controlled by a single thermostat) in larger rooms such as living rooms and family rooms. Wattage should be determined through heat loss calculations.

COMMERCIAL: Suitable as the primary heat source in smaller rooms and as supplemental heat in almost any general use area.

FEATURES

- Dual Protection: Thermal cutout with indicator light and one time thermal fuse.
- Tangential blower for whisper quiet operation.
- Northern White durable polyester powder coat finish.
- Open coil element assures quick heat and low maintenance.
- Three piece construction for ease of installation.
- Permanently lubricated, dust-protected bearings.
- 2 year warranty on element.

CATALOG NUMBER	UPC	VOLTS	CFM	PHASE	UNIT WATTAGE	SHIP AMPS	BUILT-IN WT.	T-STAT
QFG1512IFM	08809 9	120	45	1	375/750/1125/1500	3.1/6.3/9.4/12.5	8 lbs	No
QFG2024IFM	08810 5	240	45	1	500/1000/1500/2000	2.1/4.2/6.3/8.3	8 lbs	No
QFG2224IFM	08811 2	240	45	1	563/1125/1688/2250	2.3/4.7/7.0/9.4	8 lbs	No
QFG2228IF	05947 1	208	45	1	2200	10.6	8 lbs	No
QFG1512T2M	05937 2	120	45	1	1500/1125/750/375	12.5/9.4/6.3/3.1	8 lbs	Yes
QFG2024T2M	05941 9	240	45	1	2000/1500/1000/500	8.3/6.3/4.2/2.1	8 lbs	Yes
QFG2224T2M	05946 4	240	45	1	2250/1688/1125/563	9.4/7.0/4.7/2.3	8 lbs	Yes

ACCESSORIES & CONTROLS

CATALOG NUMBER	UPC	DESCRIPTION	SHIP WT.
GFRBB	03363 1	Single backbox for QFG series heater.	2 lbs
GFRBB6	03364 8	Multi-pack backbox (6pcs)	10 lbs
QFGTSP	03362 4	Single pole Thermostat (field installed)	1 lb
QFGTDP	05925 9	Double pole thermostat (field installed)	1 lb
GFRSM	05926 6	Surface Mounting Frame.	2 lbs

NOTE: "IF" models include heater assembly and grille only. Order back box separately: See accessories.

NOTE: For installations over 7500 feet above sea level we recommend using models under 1500 watts.

NOTE: T2 Model are complete heater assemblies with grille, back box, and thermostat.