



# GROUNDING

## HIGH-WING™ SYSTEM

Continuous Run Capability

**GREAVES EXCLUSIVE**

### For Direct Burial Grounding and Bonding

Applications include galvanized pipe, rod, tube, fencing, rebar (#6, 3/4" and up)  
 Continuous run, lay-in design  
 Suitable for use in harsh environments such as agricultural buildings,  
 swimming pool/spa, food processing, marine, grounding grid and others  
 Orient head in any direction - lock in position with serrated teeth  
 Replaces exothermic welding  
 Corrosion-resistant cast bronze alloy body, silicon bronze hardware  
 Approved for direct burial in earth and concrete

### Direct Burial



Copper wire only  
 Wire up to #4/0 AWG  
 Pipe sizes 1/2" to 6"



### G-DB SERIES

NAED NUMBER	CATALOG NUMBER	WATER PIPE SIZE (IN)	REBAR SIZE		GROUND WIRE	CTN QTY	EST. SHIPPING	
			#	INCH			WEIGHT (lbs)	UNIT
30750	<b>G 140-DB</b>	1/2 - 1	6 - 9	3/4 - 1 1/8	4/0STR-#10SOL	25	12.2	CTN
30760	<b>G 240-DB</b>	1 1/4 - 2	11	1 3/8		10	6.73	CTN
30770	<b>G 440-DB</b>	2 1/2 - 4	-	-		2	5.18	CTN
30780	<b>G 640-DB</b>	4 1/2 - 6	-	-		2	3.45	CTN

Not for use on epoxy coated rebar

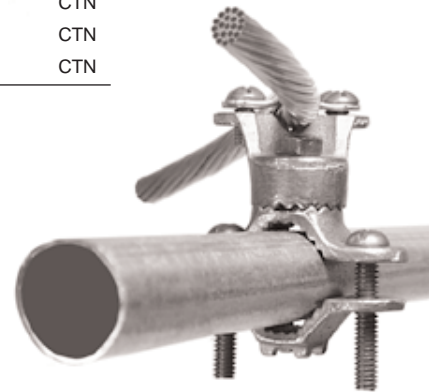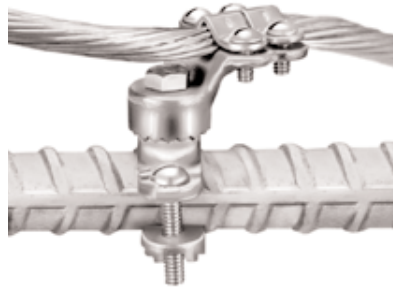

### REBAR GROUND CLAMPS

Jones Bond™ Lay-in Rebar Clamp for Continuous Loop Grounding / Bonding  
 Pool / Spa bonding and grounding  
 "Ufer" Grounding (concrete encased electrodes)  
 Replaces Exothermic Welding  
 Installs quickly, grips rebar firmly between ridges with special teeth  
 Bronze body, stainless steel screw for direct burial  
 CSA Certified for direct burial in earth and concrete on rebar

### Direct Burial

Copper wire only




### J-DB SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	REBAR SIZE		WEIGHT LBS/CTN	CTN QTY	EST. SHIPPING	
			#	INCH			WEIGHT (lbs)	UNIT
27101	<b>J 29-DB</b>	#6 SOL - 8 SOL	3	3/8	7.5	50	7.5	CTN
27110	<b>J 30-DB</b>	#4 STR - 8 SOL	4	1/2	8.5	50	8.5	CTN
27120	* <b>J 31-DB</b>	2/0 STR - 6 SOL	5	5/8	5.0	25	5.0	CTN
27130	** <b>J 32-DB</b>	4/0 STR - 6 SOL	4,5,6	1/2,5/8,3/4	4.3	12	4.3	CTN

Not for use on epoxy coated rebar.

\*UL listed for #4 STR - #2 STR

\*\* UL pending



Patent Pending