



FAN MODELS AND ACCESSORIES SUMMARY

HEAVY DUTY COMMERCIAL MODELS

MODEL NUMBER	BLADE SWEEP	COLOR	VOLTS	CYCLE	FULL LOAD AMPS	FULL LOAD WATTS	RPM	MAX CFM†	AREA COVER-AGE PER FAN††	WEIGHT
36201	36"	WHT	120	50/60	.65	75	395	12,500	1600 sq.ft.	20 lbs
48201	48"	WHT	120	50/60	.85	86	315	21,000	2025 sq.ft.	22 lbs
56001LC	56"	WHT	120	50/60	1.0	110	265	25,500	3025 sq.ft.	24 lbs
CPF56	56"	WHT	120	50/60	1.0	110	265	24,000	3025 sq.ft.	24 lbs
56HRCF	56"	WHT	120	50/60	0.8	96	330	19,800	3025 sq.ft.	24 lbs

SPECIAL APPLICATION MODELS

48201B	48"	BLACK	120	50/60	.85	86	315	21,000	2025 sq.ft.	22 lbs
48203*	48"	WHT	120	50/60	.85	86	315	21,000	2025 sq.ft.	23 lbs
56001B	56"	BLACK	120	50/60	1.0	110	275	27,500	3800 sq.ft.	24 lbs
56003*	56"	WHT	120	50/60	1.0	110	265	25,500	3025 sq.ft.	26 lbs
5630-1RDP**	56"	WHT	120	50/60/60	1.0	110	275	27,500	3800 sq.ft.	24 lbs

HARSH ENVIRONMENT MODELS***

56101	56"	WHT	120	50/60	1.0	110	265	25,500	3025 sq.ft.	24 lbs
60101	60"	WHT	120	50/60	6.4	160	280	41,000	5000 sq.ft.	30 lbs

*3-Speed Pull Chain

**Reversible, includes toggle switch

***Requires installation kit for outdoor locations

HEAVY DUTY INDUSTRIAL MODELS

56001	56"	WHT	120	50/60	1.0	110	275	27,500	3800 sq.ft.	24 lbs
56011	56"	BRN	120	50/60	1.0	110	275	27,500	3800 sq.ft.	24 lbs
26002	56"	WHT	220	50/60	.52	110	260	26,000	3800 sq.ft.	24 lbs
56007	56"	WHT	277	50/60	.60	110	260	26,000	3800 sq.ft.	24 lbs
60001	60"	WHT	120	50/60	1.4	160	315	46,000	5000 sq.ft.	30 lbs
60011	60"	BRN	120	50/60	1.4	160	315	46,000	5000 sq.ft.	30 lbs

ACCESSORIES & MISCELLANEOUS ITEMS

MODEL NUMBER	ITEM	WEIGHT
28001	FAN GUARD 62" DIAMETER FOR INDUSTRIAL 56" AND 60" FANS ♦	50
28002	FAN GUARD 52" DIAMETER FOR COMMERCIAL 36" AND 48" FAN ONLY ♦	40
9FP024	WHITE TILTED CANOPY COVER - BROWN(9FP023), BLACK(9FP023B)	1
9D12BW	DOWNRODS - 12" } Also available in brown, replace "W" in model DOWNRODS - 18" } number with "B" Ex. 9D36BB DOWNRODS - 36" } (FOR LONGER SIZES - CONSULT FACTORY) DOWNRODS - 48" }	1
9D18BW		1
9D36BW		3
9D48BW		4
99992		OUTDOOR LOCATION INSTALLATION KIT*

• Use only with heavy-duty industrial models

♦ Fan Guards ship via UPS

Custom models available. Consult with factory for information and specifications.

OPTIONAL SOLID STATE MOTOR SPEED CONTROLS

MODEL NUMBER	VOLTS	AMPS	CONTROLS						
			36"/120 36201 UNITS	48"/120 48201 UNITS	56"/120 56001 56001LC 56301RDP 56101 UNITS	56" 220/277 56002 56007 UNITS	60"/120 60001 60101 UNITS		
12003	120	3	3	2	2			1	
12006	120	6	7	5	5			3	
12008	120	8	10	6	6			4	
12012	120	12	12	10	10			8	
22003	220	3				2			
22008	220	8				6			
22012	220	12				8			
27708	277	8				6			
27712	277	12				8			

NOISELESS MECHANICAL CONTROL

12001N	120	1	1	1				
12005N	120	5	2	2				

For use with 48" and 56" models only.

3 YEAR WARRANTY REGISTRATION AGAINST MANUFACTURERS DEFECTS IS INCLUDED WITH EACH FAN.

† Effective amount of air volume moved past a plane 20ft. from fan, industry test. All specifications subject to change and improvement.

†† Area coverage rated for heat destratification at 20' blade mounting height.

DISTRIBUTED BY:



Marley
Engineered Products

An **SPX** Company

470 Beauty Spot Rd. East
Bennettsville, SC 29512 USA
www.marleymep.com
1-800-642-HEAT


ZBL-LECFA

THE PREMIUM QUALITY LINE FROM

LEADING EDGE[®]

A Marley Engineered Products Brand

COMMERCIAL/INDUSTRIAL
& SPECIAL APPLICATION
CEILING FANS

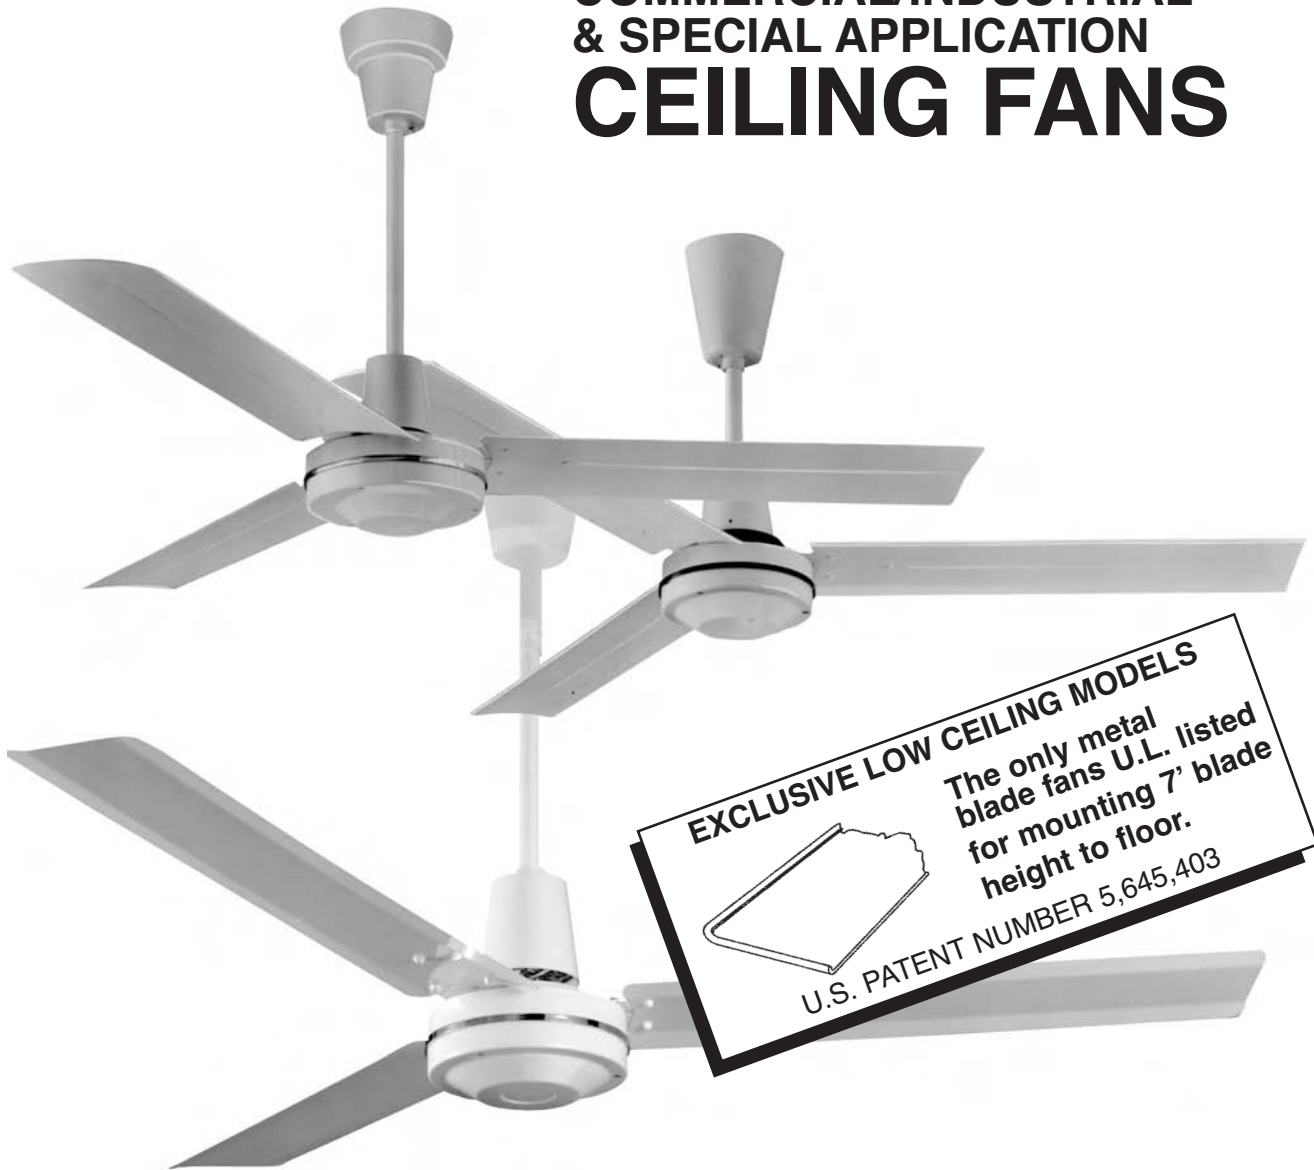

“World Leader in Ceiling Fan Systems”

Visit our website at: www.marleymep.com